


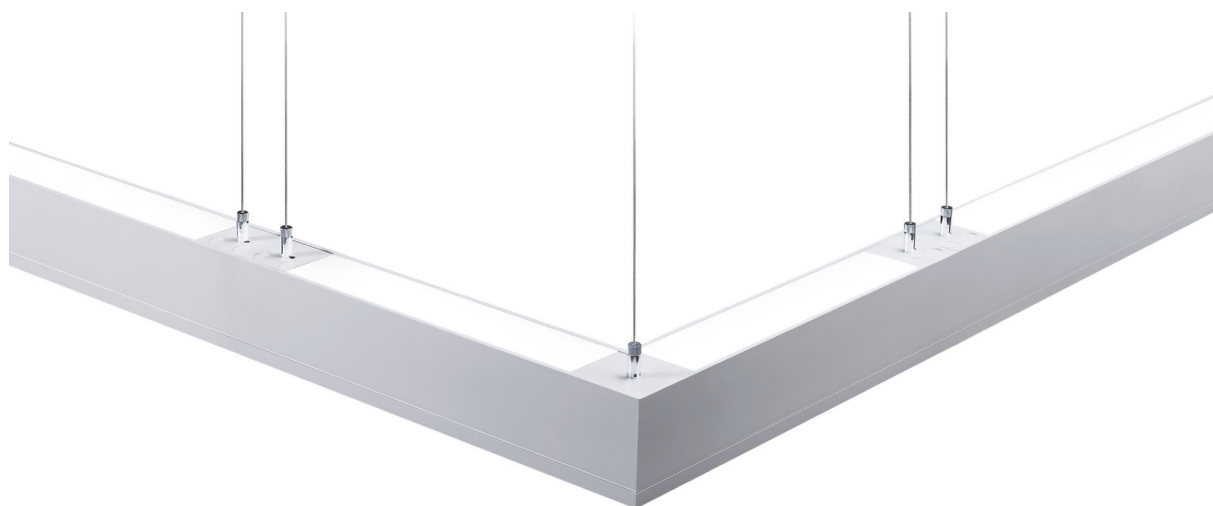

Infinitas® Corners Direct Indirect


Infinitas® by Hacer is a refined LED system. Sleek and slender in its design, the system is precision extruded and offers continuous lines of uninterrupted uniform lighting. Optional accent luminaires further enhance the versatility of Infinitas®. Available in Surface, Suspended or Recessed, in both Bezel and Bezel Free formats, the flexibility is further enhanced by uplighting variations and completely illuminated corners.

Stylish solo modules are also available to compliment the continuous system.



- Available in a choice of lumen outputs, delivering up to 4996 lumens
- Life expectancy in excess of 51,000 hours (L80 B10)
- Opal polycarbonate refractor designed for maximum performance, Refractor TP(b) rated
- Efficacies up to 97 lm/W
- Low Output Modules suitable for office and educational lighting, Glare Rating <19
- Suspended luminaires are supplied complete with 2m Wire Suspensions



Suspended Modules Fixing Centres (mm)

90° Corner Direct Indirect



60° Corner Direct Indirect

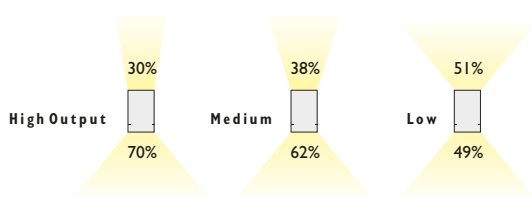

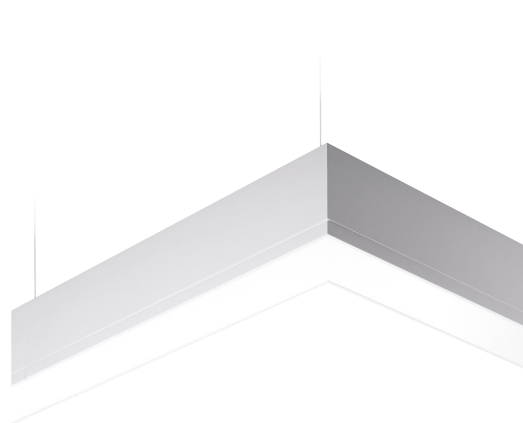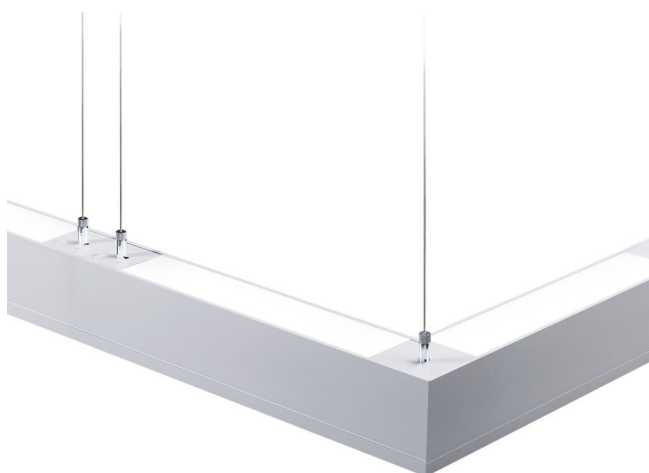

	High	Medium	Low
3 Warm White LED (3000K)	CRI 80 33W	24W	17W
Lumen Output	4794 lm	3888 lm	2656 lm
LOR	0.62	0.62	0.62
CRI	80	80	80
Total Power	35.9W	26.9W	17.6W
Power Factor	0.95	0.95	0.95
Running Current	0.16A	0.12A	0.08A
Inrush Current	46.0A (250us)	42.0A (126us)	42.0A (126us)
Efficacy	82 lm/W	89 lm/W	93 lm/W
Emergency Output (BLF)	381 (11%)*	409 (16%)*	451 (34%)*
4 Neutral White LED (4000K)	CRI 80 33W	24W	17W
Lumen Output	4996 lm	4050 lm	2756 lm
LOR	0.62	0.62	0.62
CRI	80	80	80
Total Power	35.9W	26.9W	17.6W
Power Factor	0.95	0.95	0.95
Running Current	0.16A	0.12A	0.08A
Inrush Current	46.0A (250us)	42.0A (126us)	42.0A (126us)
Efficacy	86 lm/W	93 lm/W	97 lm/W
Emergency Output (BLF)	398 (11%)*	427 (16%)*	468 (34%)*

* % of Direct illumination

To ensure illumination uniformity High, Medium or Low Output Modules should not be mixed. Modules should always be matched within their output group.



Infinitas® 90° Corners Direct Indirect

High Output

LED	33W	LED	615mm	393	LED	33	399
-----	-----	-----	-------	-----	-----	----	-----

Medium Output

LED	24W	LED	615mm	393	LED	24	413
-----	-----	-----	-------	-----	-----	----	-----

Low Output

LED	17W	LED	615mm	393	LED	17	414
-----	-----	-----	-------	-----	-----	----	-----

Infinitas® 60° Corners Direct Indirect

High Output

LED	33W	LED	658mm	492	LED	33	399
-----	-----	-----	-------	-----	-----	----	-----

Medium Output

LED	24W	LED	658mm	492	LED	24	413
-----	-----	-----	-------	-----	-----	----	-----

Low Output

LED	17W	LED	658mm	492	LED	17	414
-----	-----	-----	-------	-----	-----	----	-----

IV Link Suspended (Direct/Indirect)


IK Solo Suspended (Direct/Indirect)

A Integral Driver
E Emergency
J Switch Dim
K Switch Dim + Emergency
S DALI Dim
T DALI Dim + Emergency
C DALI Dim + DALI Emergency


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

344 3x 5m Suspensions (wires only)(2240mm/3360mm Modules)

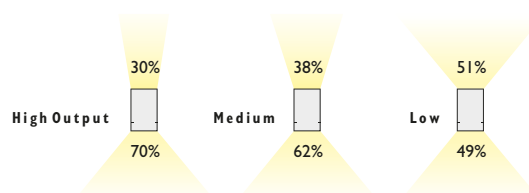


Hacel
Fluent in Lighting

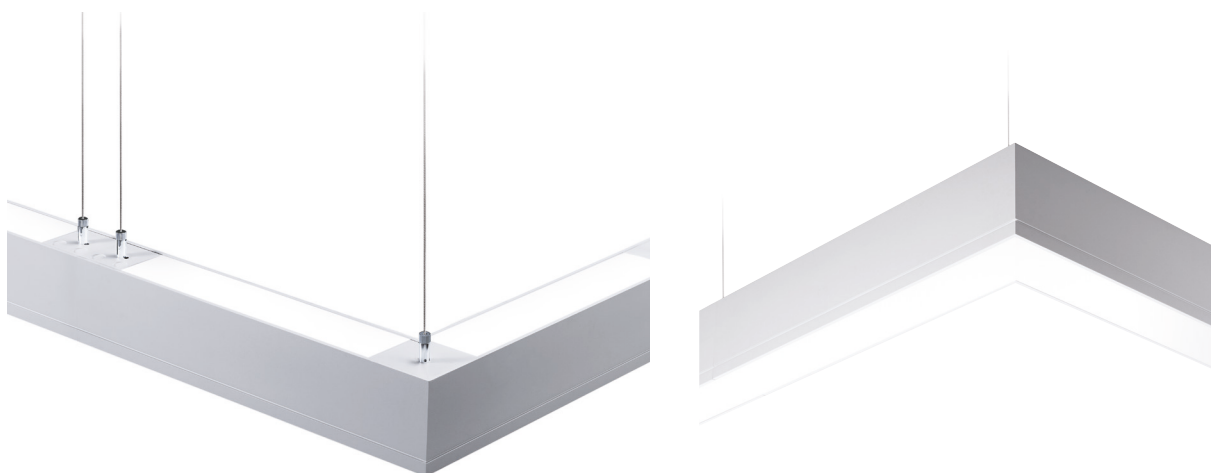


Infinitas® Corners Direct Indirect

Photometrics

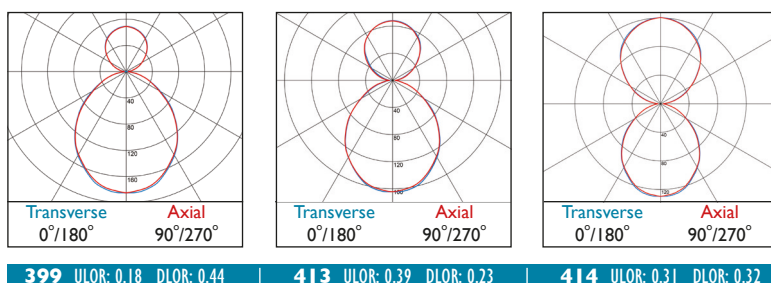

Infinitas® End Caps

2x End Caps **Suspended** IN370 **X** CAP000 **—**



Suspended