




3 Warm White LED (3000K)	CRI 80	32W	50W
Lumen Output		3438 lm	4667 lm
LOR	0.80	0.80	0.80
CRI	80	80	80
Total Power		35.5W	54.6W
Power Factor	0.95	0.98	0.98
Running Current		0.16A	0.24A
Inrush Current		25.0A (150us)	13.0A (50us)
Efficacy		77 lm/W	68 lm/W
Emergency Output (BLF)		275 lm (8%)	233 lm (5%)

4 Neutral White LED (4000K)	CRI 80	32W	50W
Lumen Output		3779 lm	5130 lm
LOR	0.80	0.80	0.80
CRI	80	80	80
Total Power		35.5W	54.6W
Power Factor	0.95	0.98	0.98
Running Current		0.16A	0.24A
Inrush Current		25.0A (150us)	13.0A (50us)
Efficacy		85 lm/W	75 lm/W
Emergency Output (BLF)		302 lm (8%)	256 lm (5%)

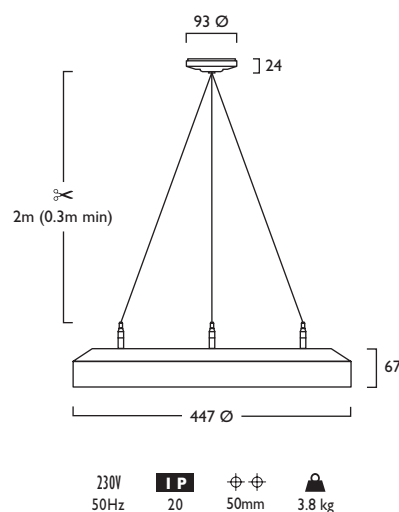

## Solos® Pendant

☀️ 🏠 📺 📺 📺 📺 📺 📺

LED

32W	LED	PN287	LED	32	+	356
50W	LED	PN287	LED	50	+	356

**Gear types F & G must be operated through a DSI**

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Luminescent Halo Options Shown


353 3x 5m Suspensions (wires only)

- Slim circular contemporary luminaire
- High performance LED offering 54,000 hour life expectancy (L70 B10)
- Available in a choice of lumen outputs, delivering up to 5130 lumens
- Efficacies up to 85 lm/W
- Colour stability within 3 MacAdams
- 2m suspension supplied as standard (Optional 5m)
- Centre feature and housing available in White, Black and Graphite (shown)
- Complementary Downlight, Surface and Wall Light versions are available

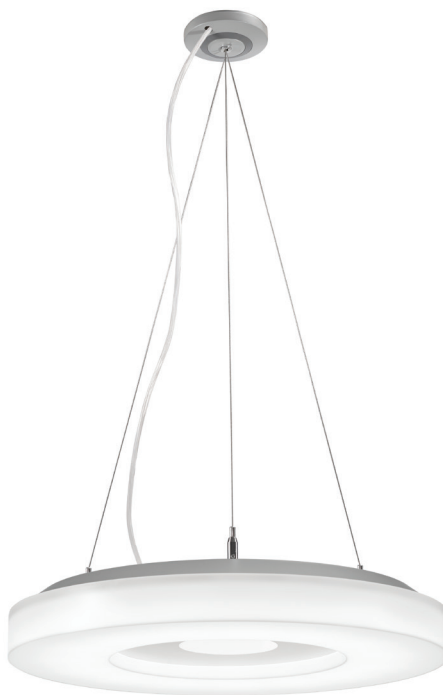


## Solos<sup>®</sup> Pendant


### ■ Luminescent Halo Options



**469** Neptune Blue




**470** Mars Red



**472** Acid Green

### Photometrics

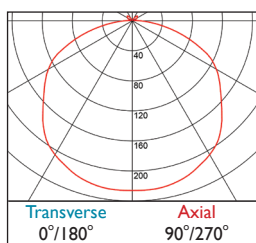

**356** DLOR: 0.80