


3	Warm White LED (3000K)	CRI 80	
		9W	15W
	Lumen Output	1521 lm	2470 lm
	LOR	0.73	0.73
	CRI	80	80
	Total Power	10.0W	16.6W
	Power Factor	0.96	0.90
	Running Current	0.05A	0.08A
	Inrush Current (Std)	5.0A (50us)	8.0A (100us)
	Inrush Current (Dim)	13.6A (304us)	13.6A (304us)
	Efficacy	111 lm/W	108 lm/W
	Emergency Output (BLF)	456 (30%)	444 (18%)

4	Neutral White LED (4000K)	CRI 80	
		9W	15W
	Lumen Output	1592 lm	2585 lm
	LOR	0.73	0.73
	CRI	80	80
	Total Power	10.0W	16.6W
	Power Factor	0.96	0.90
	Running Current	0.05A	0.08A
	Inrush Current (Std)	5.0A (50us)	8.0A (100us)
	Inrush Current (Dim)	13.6A (304us)	13.6A (304us)
	Efficacy	116 lm/W	113 lm/W
	Emergency Output (BLF)	477 (30%)	465 (18%)

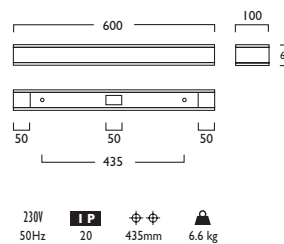

Linaj 977

LED


9W	LED	600mm	WL977	LED	09	+	432
15W	LED	600mm	WL977	LED	15	+	432

- Sleek stunning minimalistic design
- Available in a choice of lumen outputs, delivering up to 2585 lumens
- Efficacies up to 116 lm/W
- High quality 10mm Etched glass to upper and lower fascia
- 72,000 hour life expectancy (L80 B10)
- Horizontal and vertical mounting, Linaj Link format available
- Striking optional Luminescent Trims offer colour customisation
- Wireless Lighting Control available, see Connected video for full overview

Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency


- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)
- Luminescent Trim - Examples Shown on page 2

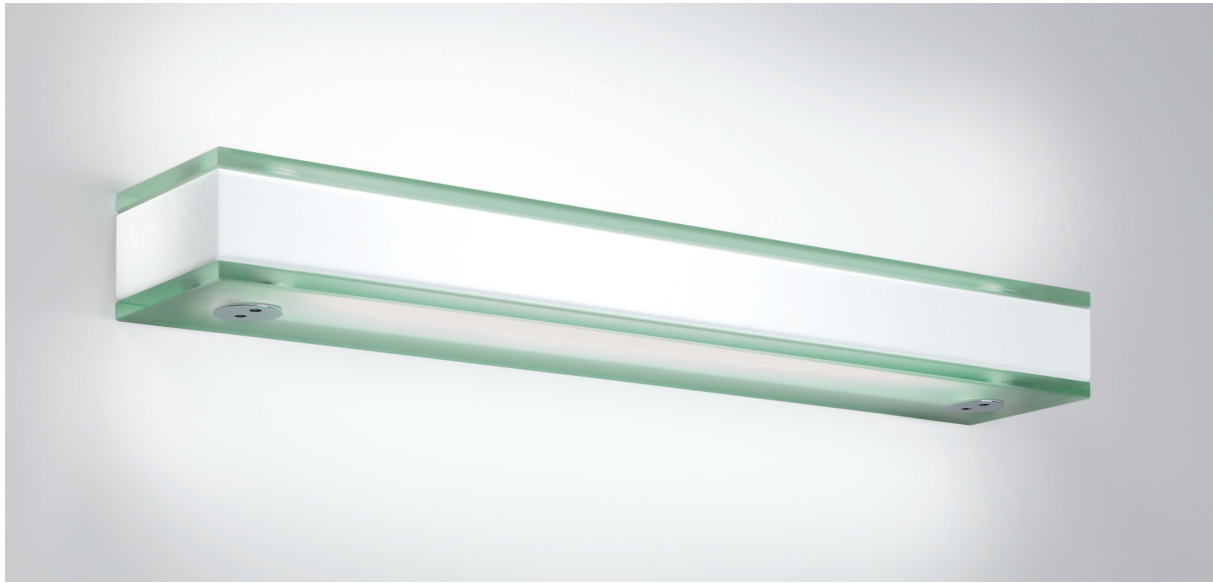


Linaj 977

Options

■ Luminescent Trim



279 Neptune Blue




280 Mars Red



282 Acid Green

Photometrics



Transverse 0°/180° Axial 90°/270°

432 ULOR: 0.37 DLOR: 0.36