


3	Warm White LED (3000K)	CRI 80	
		17W	31W
	Lumen Output	2838 lm	5304 lm
	LOR	0.73	0.73
	CRI	80	80
	Total Power	18.6W	34.6W
	Power Factor	0.95	0.95
	Running Current	0.09A	0.16A
	Inrush Current (Std)	15.0A (250us)	15.0A (250us)
	Inrush Current (Dim)	13.6A (304us)	29.0A (180us)
	Efficacy	111 lm/W	111 lm/W
	Emergency Output (BLF)	454 (16%)	424 (8%)

4	Neutral White LED (4000K)	CRI 80	
		17W	31W
	Lumen Output	2970 lm	5550 lm
	LOR	0.73	0.73
	CRI	80	80
	Total Power	18.6W	34.6W
	Power Factor	0.95	0.95
	Running Current	0.09A	0.16A
	Inrush Current (Std)	15.0A (250us)	15.0A (250us)
	Inrush Current (Dim)	13.6A (304us)	29.0A (180us)
	Efficacy	116 lm/W	117 lm/W
	Emergency Output (BLF)	475 (16%)	444 (8%)



Linaj 981

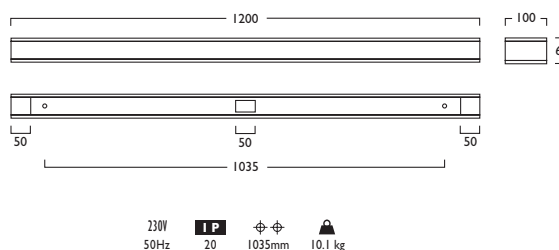

LED

17W	LED	1200mm	WL981	LED	17	+	433
31W	LED	1200mm	WL981	LED	31	+	433

- Sleek stunning minimalistic design
- Available in a choice of lumen outputs, delivering up to 5550 lumens
- Efficacies up to 117 lm/W
- High quality 10mm Etched glass to upper and lower fascia
- 72,000 hour life expectancy (L80 B10)
- Horizontal and vertical mounting, Linaj Link format available
- Striking optional Luminescent Trims offer colour customisation
- Wireless Lighting Control available, see Connected video for full overview


Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)


■ Luminescent Trim *Show*

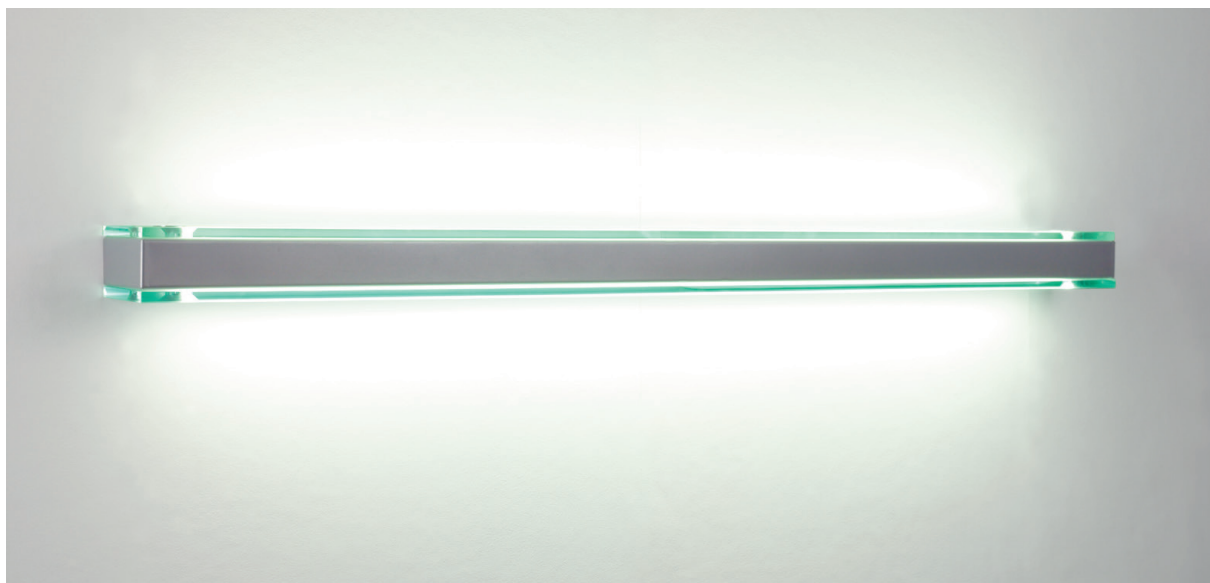


Linaj 981

Options

■ Luminescent Trim



275 Neptune Blue




276 Mars Red



278 Acid Green

Photometrics

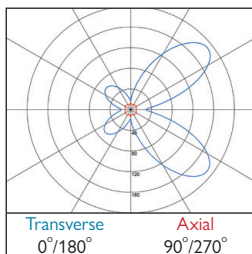

433 ULOR: 0.36 DLOR: 0.37