




3	Warm White LED (3000K)	CRI 80	15W	24W
	Lumen Output		2706 lm	4022 lm
	LOR		0.62	0.62
	CRI		80	80
	Total Power		17.3W	27.4W
	Power Factor		0.95	0.96
	Running Current		0.08A	0.12A
	Inrush Current (Std)		15.0A (204us)	16.0A (229us)
	Inrush Current (Dim)		18.0A (140us)	25.0A (141us)
	Efficacy		96 lm/W	91 lm/W
	Emergency Output (BLF)		460 lm (17%)	442 lm (11%)
4	Neutral White LED (4000K)	CRI 80	15W	24W
	Lumen Output		2832 lm	4209 lm
	LOR		0.62	0.62
	CRI		80	80
	Total Power		17.3W	27.4W
	Power Factor		0.95	0.96
	Running Current		0.08A	0.12A
	Inrush Current (Std)		15.0A (204us)	16.0A (229us)
	Inrush Current (Dim)		18.0A (140us)	25.0A (141us)
	Efficacy		101 lm/W	95 lm/W
	Emergency Output (BLF)		481 lm (17%)	462 lm (11%)



Ambiere

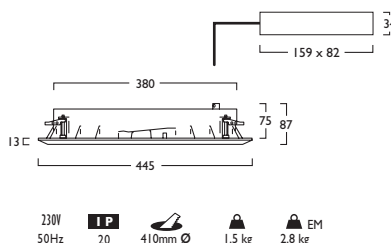

LED

15W	LED	ID396	LED	15	1	+	372
24W	LED	ID396	LED	24	1	+	372

LED & MW

15W	LED	ID397	LED	15	1	+	372
24W	LED	ID397	LED	24	1	+	372

MW versions not suitable for use with Gear Types J, K, L and M

Control Devices

Microwave/PIR Controller	CD295	X	PIR000
Microwave/PIR Programmer	CD296	X	PIR000

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim (ID396 only)
- K Switch Dim + Emergency (ID396 only)
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth (ID396 only)
- M DALI Bluetooth + Emergency (ID396 only)

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010)

250 Gasket (IP44)

Glass, Luminescent Halo Options - Examples Shown on page 2

- High performance, contemporary luminaire with understated presence
- Available in a choice of lumen outputs, delivering up to 4209 lumens
- Efficacies up to 101 lm/W
- Precision injection moulded low profile construction
- High quality Opal polycarbonate diffuser
- Exceptional life expectancy in excess of 72,000 hours (L80 B10)
- Coloured and etched customisation Options
- TP(b) Rated as standard
- The Microwave Sensor defaults can be modified with the use of the Hand Held Controller or Programmer (contact Technical for advice)
- IP44 Rated when used with Gasket Option 250
- Wireless Lighting Control available, see Connected video for full overview




Ambiere

Options

■ **Glass, Luminescent Halo** Options



501 Clear Glass



502 Neptune Blue




503 Mars Red



504 Acid Green

Photometrics



372 DLOR: 0.62