



3	Warm White LED (3000K)	CRI 80		
		25W	31W	46W
	Lumen Output	4232 lm	5304 lm	7390 lm
	LOR	0.86	0.86	0.86
	CRI	80	80	80
	Total Power	25.7W	34.6W	49.3W
	Power Factor	0.98	0.95	0.95
	Running Current	0.11A	0.16A	0.23A
	Inrush Current (Std)	32.0A (240us)	15.0A (250us)	33.0A (250us)
	Inrush Current (Dim)	22.4A (176us)	22.4A (176us)	40.0A (178us)
	Efficacy	141 lm/W	131 lm/W	128 lm/W
	Emergency Output (BLF)	465 lm (11%)	428 lm (8%)	443 lm (6%)


4	Neutral White LED (4000K)	CRI 80		
		25W	31W	46W
	Lumen Output	4428 lm	5550 lm	7732 lm
	LOR	0.86	0.86	0.86
	CRI	80	80	80
	Total Power	25.7W	34.6W	49.3W
	Power Factor	0.98	0.95	0.95
	Running Current	0.11A	0.16A	0.23A
	Inrush Current (Std)	32.0A (240us)	15.0A (250us)	33.0A (250us)
	Inrush Current (Dim)	22.4A (176us)	22.4A (176us)	40.0A (178us)
	Efficacy	148 lm/W	137 lm/W	134 lm/W
	Emergency Output (BLF)	487 lm (11%)	444 lm (8%)	463 lm (6%)

- Available in a choice of lumen outputs, delivering up to 7732 lumens
- Efficacies up to 148 lm/W
- Comprehensive choice of wattages and Control Gear types
- Life expectancy 72,000 hours (L80 B10)
- Extruded 'wipe clean' clear polycarbonate refractor with internal linear microprisms
- Exceptional wide light distribution for general lighting applications
- Colour stability within 3 MacAdams
- Designed to accept fixings for lighting trunking and uni-strut
- Complementary Pendant version available
- Wireless Lighting Control available, see Connected video for full overview

Ariga Surface

☀️ 📱 🏠 🔌 Ⓚ 🔊 + ⚠️

LED	Wattage	Length	Control Gear	LED Type	Temp	Dim	Emergency	Warranty
25W LED	1239mm	SM395	LED	25	-	+	373	
31W LED	1239mm	SM395	LED	31	-	+	373	
46W LED	1239mm	SM395	LED	46	-	+	373	

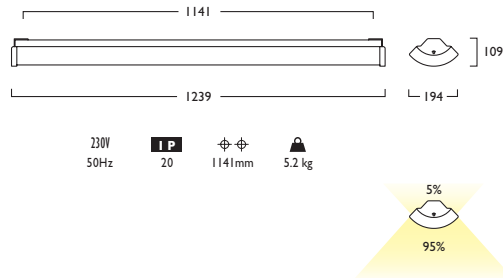

Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

- 3** Warm (3000K) **4** Neutral (4000K)
- 1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)


- 258** Tamperproof End Caps
- 259** Tamperproof Screwdriver (T20)

Options



258 Tamperproof End Caps

Photometrics

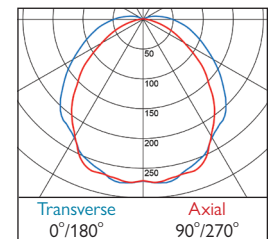

373 ULR: 0.04 DLOR: 0.82