

3	Warm White LED (3000K)	CRI 80	17W
	Lumen Output		2838 lm
	LOR		0.83
	CRI		80
	Total Power		18.8W
	Power Factor		0.95
	Running Current		0.09A
	Inrush Current (Std)		21.0A (126us)
	Inrush Current (Dim)		13.6A (304us)
	Efficacy		125 lm/W
	Emergency Output (BLF)		425 (15%)


4	Neutral White LED (4000K)	CRI 80	17W
	Lumen Output		2970 lm
	LOR		0.83
	CRI		80
	Total Power		18.8W
	Power Factor		0.95
	Running Current		0.09A
	Inrush Current (Std)		21.0A (126us)
	Inrush Current (Dim)		13.6A (304us)
	Efficacy		131 lm/W
	Emergency Output (BLF)		445 (15%)

- Distinctive sculpted design, incorporating high performance Zhaga book 7 LED
- Available in a choice of lumen outputs, delivering up to 2970 lumens
- Efficacies up to 131 lm/W
- Colour stability within 3 MacAdams
- High quality Opal Polycarbonate Diffuser
- Perfect equal balance of uplighting and downlighting
- Life expectancy in excess of 72,000 hours (L80 B10)
- Versatile control options available
- Wireless Lighting Control available, see Connected video for full overview

## Cenaro


LED

17W LED WL045 LED 17 415

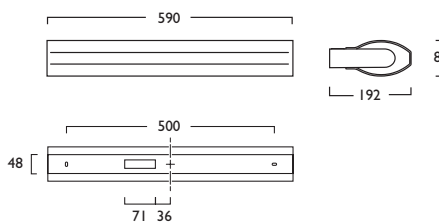

230V 50Hz IP20 500mm 3.4 kg

### Photometrics



**Gear types F & G must be operated through a DSI**

- A Integral Driver
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)