




	CRI 80	6W	9W	15W
3 Warm White LED (3000K)				
Lumen Output		1124 lm	1535 lm	2542 lm
LOR		0.83	0.83	0.83
CRI		80	80	80
Total Power		7.1W	10.1W	17.0W
Power Factor		0.92	0.90	0.95
Running Current		0.03A	0.05A	0.08A
Inrush Current (Std)		17.0A (309us)	5.0A (100us)	20.0A (200us)
Inrush Current (Dim)		15.0A (243us)	15.0A (243us)	20.0A (133us)
Efficacy		131 lm/W	126 lm/W	124 lm/W
Emergency Output (BLF)		472 (42%)	445 (29%)	432 (17%)
4 Neutral White LED (4000K)				
Lumen Output		1176 lm	1606 lm	2660 lm
LOR		0.83	0.83	0.83
CRI		80	80	80
Total Power		7.1W	10.1W	17.0W
Power Factor		0.92	0.90	0.95
Running Current		0.03A	0.05A	0.08A
Inrush Current (Std)		17.0A (309us)	5.0A (100us)	20.0A (200us)
Inrush Current (Dim)		15.0A (243us)	15.0A (243us)	20.0A (133us)
Efficacy		137 lm/W	131 lm/W	129 lm/W
Emergency Output (BLF)		493 (42%)	465 (29%)	452 (17%)

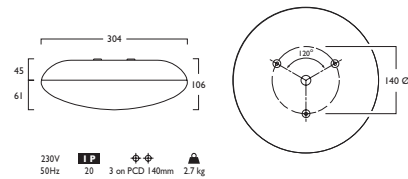

Pebl[®] Surface

LED	6W	9W	15W
LED	SD898	SD898	SD898
LED	06	09	15
+	500	500	500

LED & MW	6W	9W	15W
LED	SD1165	SD1165	SD1165
LED	06	09	15
+	500	500	500

MW versions not suitable for use with Gear Types J, K, L and M

Control Devices	PIR Handset
CD1603	X PIR000

Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim (SD898 only)
- K** Switch Dim + Emergency (SD898 only)
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth (SD898 only)
- M** DALI Bluetooth + Emergency (SD898 only)

- 3** Warm (3000K) **4** Neutral (4000K)
- 1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

- Options
- 259** Tamperproof Screwdriver (T20)
 - 579** IP65 Single Gasket Kit

- Lumens outputs up to 2660 lumens
- Efficacies up to 137 lm/W
- Life expectancy in excess of 72,000 Hours (L80 B10)
- IP65 Option available
- Colour Stability within 3 MacAdams
- Microwave control is discretely concealed behind diffuser
- The sensor defaults can be modified via dip switches for non-dimmable versions and with the use of the PIR Handset for dimmable versions (contact Technical for advice if required)
- IK10 compliant
- Supplied with both standard and tamperproof Diffuser Retaining Screws
- Complementary Wall Light versions available
- Wireless Lighting Control available, see Connected video for full overview
- Dip switch settings can be found on Installation document - default setting is 5 Seconds

Photometrics

