


3	Warm White LED (3000K)	CRI 80 17W
	Lumen Output	2838 lm
	LOR	0.83
	CRI	80
	Total Power	18.8W
	Power Factor	0.95
	Running Current	0.09A
	Inrush Current (Std)	21.0A (126us)
	Inrush Current (Dim)	13.6A (304us)
	Efficacy	125 lm/W
	Emergency Output (BLF)	425 (15%)
4	Neutral White LED (4000K)	CRI 80 17W
	Lumen Output	2970 lm
	LOR	0.83
	CRI	80
	Total Power	18.8W
	Power Factor	0.95
	Running Current	0.09A
	Inrush Current (Std)	21.0A (126us)
	Inrush Current (Dim)	13.6A (304us)
	Efficacy	131 lm/W
	Emergency Output (BLF)	445 (15%)

- Available in a choice of lumen outputs, delivering up to 2970 lumens
- Efficacies up to 131 lm/W
- Colour stability within 3 MacAdams
- High quality Opal Polycarbonate Diffuser
- Perfect equal balance of uplighting and downlighting
- Life expectancy in excess of 72,000 hours (L80 B10)
- Versatile control options available
- Wireless Lighting Control available, see Connected video for full overview


## Cenaro

LED  
 17W LED WL045 LED 17 415

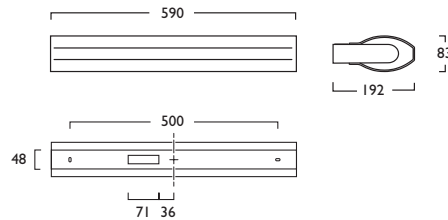

230V  
50Hz  
 LP 20  
 500mm  
 3.4 kg

### Photometrics



Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
  - E Emergency
  - F Digital Dim
  - G Digital Dim + Emergency
  - J Switch Dim
  - K Switch Dim + Emergency
  - S DALI Dim
  - T DALI Dim + Emergency
  - C DALI Dim + DALI Emergency
  - L DALI Bluetooth
  - M DALI Bluetooth + Emergency
- 3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hancel.co.uk Web: www.hancel.co.uk

V3 - 06/2023