




3 Warm White LED (3000K)	CRI 80	15W	32W	50W
Lumen Output	2795 lm	5405 lm	8241 lm	
LOR	0.70	0.70	0.70	
CRI	80	80	80	
Total Power	17.2W	34.5W	54.3W	
Power Factor	0.87	0.96	0.95	
Running Current	0.7A	0.14A	0.22A	
Inrush Current (Std)	2.9A (61us)	24.7A (268us)	25.9A (252us)	
Inrush Current Dim)	25.0A (140us)	28.0A (165us)	26.0A (264us)	
Efficacy	113 lm/W	109 lm/W	106 lm/W	
Emergency Output (BLF)	395 lm (14%)	387 lm (7%)	412 lm (5%)	

4 Neutral White LED (4000K)	CRI 80	15W	32W	50W
Lumen Output	2969 lm	5743 lm	8756 lm	
LOR	0.70	0.70	0.70	
CRI	80	80	80	
Total Power	17.2W	34.5W	54.3W	
Power Factor	0.87	0.96	0.95	
Running Current	0.7A	0.14A	0.22A	
Inrush Current (Std)	2.9A (61us)	24.7A (150us)	25.9A (252us)	
Inrush Current Dim)	25.0A (140us)	28.0A (165us)	26.0A (264us)	
Efficacy	120 lm/W	116 lm/W	112 lm/W	
Emergency Output (BLF)	417 lm (14%)	411 lm (7%)	438 lm (5%)	

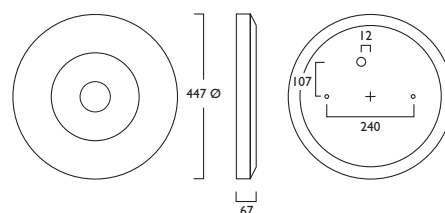

230V
50Hz

IP
20

Φ Φ
240mm

3.5 kg

Control Devices

PIR Handset



CD1603



X

PIR000

Solos® Wall Light



LED

15W	LED	WL286	LED	15	+	737
32W	LED	WL286	LED	32	+	737
50W	LED	WL286	LED	50	+	737

LED & MW

15W	LED	WL329	LED	15	+	737
32W	LED	WL329	LED	32	+	737
50W	LED	WL329	LED	50	+	737

MW versions not suitable for use with Gear Types J and K

Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim (WL286 only)
- K** Switch Dim + Emergency (WL286 only)
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Luminescent Halo Options - Examples Shown on page 2

- High performance LED Circular light offering 65,000 hour life expectancy (L80 B10)
- Lumen outputs from 2795 to 8756 lumens
- Efficacies up to 120 lm/W
- Colour stability within 3 MacAdams
- Microwave Control is discreetly concealed behind diffuser
- Slim luminaire projection of only 67mm
- Centre feature and housing available in White, Black or Urban Graphite
- The sensor defaults can be modified via dip switches for non-dimmable versions and with the use of the PIR Handset for dimmable versions (contact Technical for advice if required)
- TP(b) rated as standard
- Complementary Pendant, Recessed and Surface versions available.
- Wireless Lighting Control available, see Connected video for full overview
- Dip switch settings can be found on Installation document - default setting is 5 Seconds

Hacel
Fluent in Lighting



Solos® Wall Light

Options

■ Luminescent Edge Options



469 Neptune Blue




470 Mars Red



472 Acid Green

Photometrics



737 DLOR: 0.70