



### Edj 1200 Pendant

	CRI 80	37W	46W
<b>3 Warm White LED (3000K)</b>			
Lumen Output	6648	8141	
LOR	0.62	0.62	
CRI	80	80	
Total Power	41W	51.2W	
Power Factor	0.97	0.97	
Running Current	0.19A	0.23A	
Inrush Current (Std)	20A (90us)	20A (90us)	
Inrush Current (Dim)	31.2A (182us)	31.2A (182us)	
Efficacy	100lm/W	98lm/W	
Emergency Output (BLF)	360 (5%)	360 (4%)	

	CRI 80	37W	46W
<b>4 Neutral White LED (4000K)</b>			
Lumen Output	7062	8649	
LOR	0.62	0.62	
CRI	80	80	
Total Power	41W	51.2W	
Power Factor	0.97	0.97	
Running Current	0.19A	0.23A	
Inrush Current (Std)	20A (90us)	20A (90us)	
Inrush Current (Dim)	31.2A (182us)	31.2A (182us)	
Efficacy	106lm/W	104lm/W	
Emergency Output (BLF)	383 (5%)	383 (4%)	


### Edj 600 Pendant

	CRI 80	18W	22W
<b>3 Warm White LED (3000K)</b>			
Lumen Output	3138	3883	
LOR	0.62	0.62	
CRI	80	80	
Total Power	19.3W	24.3W	
Power Factor	0.93	0.95	
Running Current	0.09A	0.11A	
Inrush Current (Std)	4.97A (100us)	4.97A (100us)	
Inrush Current (Dim)	13.84A (282us)	13.84A (282us)	
Efficacy	100lm/W	99lm/W	
Emergency Output (BLF)	390 (12%)	390 (10%)	

	CRI 80	18W	22W
<b>4 Neutral White LED (4000K)</b>			
Lumen Output	3334	4126	
LOR	0.62	0.62	
CRI	80	80	
Total Power	19.3W	24.3W	
Power Factor	0.93	0.95	
Running Current	0.09A	0.11A	
Inrush Current (Std)	4.97A (100us)	4.97A (100us)	
Inrush Current (Dim)	13.84A (282us)	13.84A (282us)	
Efficacy	107lm/W	105lm/W	
Emergency Output (BLF)	414 (12%)	414 (10%)	

Note: Figures above refer to standard A gear unless stated

## Edj 1200/600 Pendant



### Edj 1200

LED CRI 80

37W	LED	PN1212	LED	37	+	758
46W	LED	PN1212	LED	46	+	758

### Edj 600

LED CRI 80

18W	LED	PN1359	LED	18	+	758
22W	LED	PN1359	LED	22	+	758

- UGR<19 Compliant on all outputs
- Lumen outputs from 3138 to 8649 lumens
- Efficacies up to 107 lm/W
- Comprehensive choice of Control Gear types
- Life expectancy 54,000 hours (L90 B10), 72,000 hours (L80 B10)
- Laser etched polycarbonate diffuser providing excellent light distribution
- Complete with 2x 2m suspension wires and chrome clutches - Max 2m drop
- Colour stability within 3 MacAdams
- Wireless Lighting Control available
- CRI90 versions available (Edj 1200 - PN1213 & Edj 600 - PN1360)
- Digital Dim and Digital Dim + Emergency options available

- A** Integral Driver/Remote
- E** Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

**3** Warm (3000K) **4** Neutral (4000K)


**1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk) V5 - 05/2026


\* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.



## Edj 1200/600 Pendant

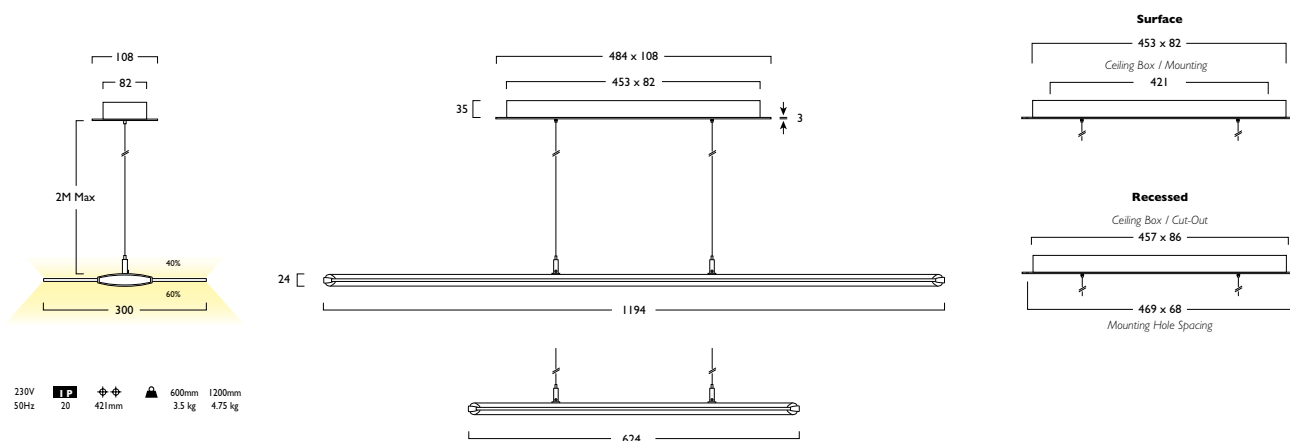

### Photometrics

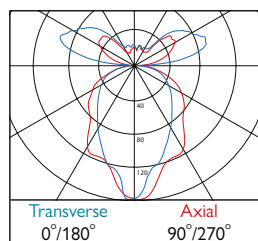

**758 / 759** ULOR: 0.57 DLOR: 0.60

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk)

\* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.