




3	Warm White LED (3000K)	CRI 80	17W	24W
	Lumen Output		2838 lm	4232 lm
	LOR		0.80	0.80
	CRI		80	80
	Total Power		18.8W	25.7W
	Power Factor		0.95	0.98
	Running Current		0.09A	0.11A
	Inrush Current (Std)		21.0A (126us)	32.0A (240us)
	Inrush Current (Dim)		13.6A (304us)	29.0A (180us)
	Efficacy		120 lm/W	131 lm/W
	Emergency Output (BLF)		454 lm (16%)	465 lm (11%)

4	Neutral White LED (4000K)	CRI 80	17W	24W
	Lumen Output		2970 lm	4428 lm
	LOR		0.80	0.80
	CRI		80	80
	Total Power		18.8W	25.7W
	Power Factor		0.95	0.98
	Running Current		0.09A	0.11A
	Inrush Current (Std)		21.0A (126us)	32.0A (240us)
	Inrush Current (Dim)		13.6A (304us)	29.0A (180us)
	Efficacy		126 lm/W	137 lm/W
	Emergency Output (BLF)		475 lm (16%)	487 lm (11%)

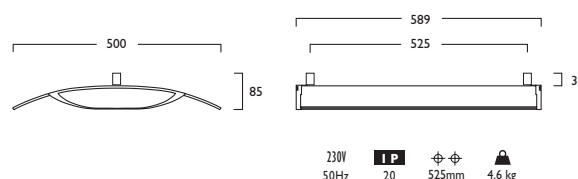

iMod[®] Surface



LED

17W	LED	SM099	LED	17	+	434
24W	LED	SM099	LED	24	+	434

- Imaginative translucent design creates a unique and distinctive style statement
- Available in a choice of lumen outputs, delivering up to 4428 lumens
- Efficacies up to 137 lm/W
- Offering 72,000 hour life expectancy (L80 B10)
- Comprehensive choice of Gear Types available
- Luminescent Wing offers vivid coloured indirect lighting whilst maintaining white direct illumination
- Complementary Pendant version available

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046)


Luminescent Wing Options Shown

226 LG7T bar Reflectance Panel




iMod[®] Surface

■ Luminescent Wing Options




229 Mars Red



231 Acid Green


226 LG7 T bar Reflectance Panel



Provides the correct reflectance to achieve LG7 in T bar suspended ceilings

LG7 in accordance with SLL Code for Lighting 2012

Photometrics



434 ULOR: 0.05 DLOR: 0.75