




## Wallwasher Grid

**LED**



22W	LED	IM290	LED	22	I	358
28W	LED	IM290	LED	28	I	358

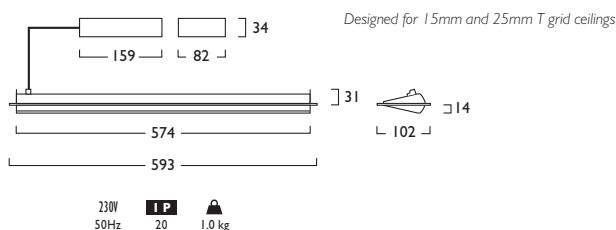

	CRI 80	22W	28W
<b>3 Warm White LED (3000K)</b>			
Lumen Output	3704 lm	4564 lm	
LOR	0.86	0.86	
CRI	80	80	
Total Power	24.4W	29.5W	
Power Factor	0.96	0.95	
Running Current	0.11A	0.14A	
Inrush Current (Std)	16.0A (229us)	10.0A (100us)	
Inrush Current (Dim)	25.0A (141us)	28.0A (195us)	
Efficacy	130 lm/W	133 lm/W	
Emergency Output (BLF)	N/A	N/A	
<b>4 Neutral White LED (4000K)</b>			
Lumen Output	3876 lm	4776 lm	
LOR	0.86	0.86	
CRI	80	80	
Total Power	24.4W	29.5W	
Power Factor	0.96	0.95	
Running Current	0.11A	0.14A	
Inrush Current (Std)	16.0A (229us)	10.0A (100us)	
Inrush Current (Dim)	25.0A (141us)	28.0A (195us)	
Efficacy	136 lm/W	139 lm/W	
Emergency Output (BLF)	N/A	N/A	

- Unique extruded aluminium 'drop down' asymmetric design
- Available in a choice of lumen outputs, delivering up to 4776 lumens
- Efficacies up to 139 lm/W
- Outstanding performance with an LOR of 0.86
- Zhaga Book 7 LED
- Utilises high quality lighting class LED semiconductors
- Delivers illumination directly into the wall and ceiling junction
- Tridonic converters including DALI, Digital and Switch Dim versions
- Recessing depth of only 31mm
- Life expectancy in excess of 72,000 hours (L80 B10)

### Photometrics

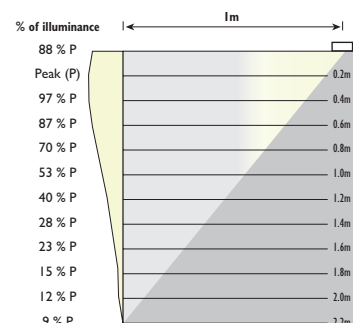

Gear type F must be operated through a DSI

- A** Integral Driver
- F** Digital Dim
- J** Switch Dim
- S** DALI Dim

**3** Warm (3000K) **4** Neutral (4000K)

**I** White (RAL 9010)

Interconnection options available contact Sales