




3	Warm White LED (3000K)	CRI 80	32W
	Lumen Output		4590 lm
	LOR		0.80
	CRI		80
	Total Power		35.3W
	Power Factor		0.95
	Running Current		0.16A
	Inrush Current (Std)		24.7A (268us)
	Inrush Current (Dim)		28.0A (195us)
	Efficacy		104 lm/W
	Emergency Output (BLF)		367 lm (8%)

4	Neutral White LED (4000K)	CRI 80	32W
	Lumen Output		4890 lm
	LOR		0.80
	CRI		80
	Total Power		35.3W
	Power Factor		0.95
	Running Current		0.16A
	Inrush Current (Std)		24.7A (268us)
	Inrush Current (Dim)		28.0A (195us)
	Efficacy		110 lm/W
	Emergency Output (BLF)		391 lm (8%)

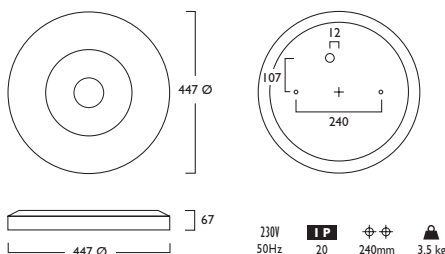

Solos[®] Surface



LED

32W LED SD286 LED 32 + 354

LED & MW

32W LED SD329 LED 32 + 354

MW versions not suitable for use with Gear Types J, K, L and M

Control Devices



Microwave/PIR Controller CD295 X PIR000
 Microwave/PIR Programmer CD296 X PIR000

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim (WL286 only)
- K** K Switch Dim + Emergency (WL286 only)
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth (WL286 only)
- M** DALI Bluetooth + Emergency (WL286 only)

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

■ Luminescent Halo Options *Shown*

- Sleek high performance LED Circular luminaire offering 100,000 hour life expectancy (L80 B10)
- Available in a choice of lumen outputs, delivering up to 4890 lumens
- Efficacies up to 110 lm/W
- Colour stability within 3 MacAdams
- Microwave Control is discreetly concealed behind diffuser
- Slim luminaire projection of only 67mm
- Centre feature and housing available in White, Black or Urban Graphite
- The Microwave Sensor defaults can be modified with the use of the Hand Held Controller or Programmer (contact Technical for advice)
- TP(b) rated as standard
- Complementary Recessed Downlight, Pendant and Wall Light versions available
- Wireless Lighting Control available, see Connected video for full overview



Solos[®] Surface

■ Luminescent Edge Options



469 Neptune Blue




470 Mars Red



472 Acid Green

Photometrics

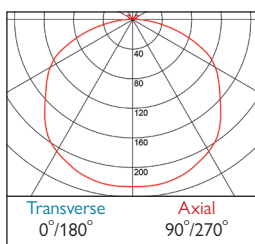

354 DLOR: 0.73