

PIR version shown

Vertigo® Duet



LED

68W LED 1625 LED 68 + 462


LED & PIR

68W LED 1625 LED 68 + 462


PIR versions not suitable for use with Gear Types J, K, L and M

Control Devices

Microwave/PIR Controller

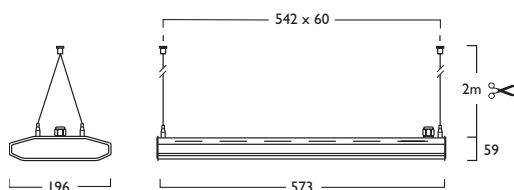

230V 50Hz IP 20 542 x 60mm 3.1 kg Ta 40°C



- Available in a choice of lumen outputs delivering up to 11,947 lumens
- Efficacies up to 126 lm/W
- Wide beam refractor (82°) as standard, ideally suited to Warehouse and Superstore applications
- Optional extra wide beam refractor (112°) for general illumination
- Suitable for ambient temperatures up to 40°C
- Life expectancy in excess of 72,000 hours (L80 B10) at 25°C ambient and 70,000 hours (L80 B10) at 40°C ambient
- Colour stability within 3 MacAdams
- The PIR Detector defaults can be modified with the use of the Hand Held Controller (contact Technical for advice)
- Versatile installation solutions include Suspended, Surface, Trunking and Gripple. (Gripple and Trunking not supplied with fixings)
- Suspension versions supplied with 2 x 2m Suspensions and chrome clutches as standard
- IK08 Compliant
- Wireless Lighting Control available, see Connected video for full overview

PN Pendant GR Gripple SM Surface TM Trunking

NB: Gripple and Trunking versions not supplied with fixings. Gripple versions can be used for chain mounting.

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Reflector Option

- 545 2x ExtraWide Beam 465
- 144 2x 5m Twin Suspensions (Wires only)




Duet 573 x 196 x 59mm


Vertigo® Duet

3	Warm White LED (3000K)	CRI 80 68W
	Lumen Output	11362 lm
	LOR	0.80
	CRI	80
	Total Power	75.5W
	Power Factor	0.95
	Running Current	0.31A
	Inrush Current (Std)	5A (1000us)
	Inrush Current (Dim)	17.3 (164us)
	Efficacy	120 lm/W
	Emergency Output (BLF)	443 lm (4%)
4	Neutral White LED (4000K)	CRI 80 68W
	Lumen Output	11947 lm
	LOR	0.80
	CRI	80
	Total Power	75.5W
	Power Factor	0.95
	Running Current	0.31A
	Inrush Current (Std)	5A (1000us)
	Inrush Current (Dim)	17.3A (164us)
	Efficacy	126 lm/W
	Emergency Output (BLF)	464 lm (4%)

Photometrics



462 DLOR: 0.80

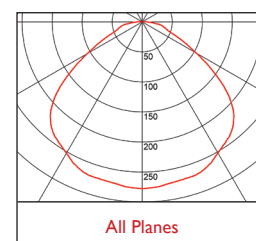

465 DLOR: 0.80

Suspensions and Mounting details shown over

Vertigo® Duet Suspensions & Mounting


Fixing Types

PN Pendant

GR Gripple

SM Surface


TM Trunking

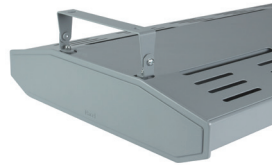


Fixing Centres

Duet / Duet Linear


PN Suspended

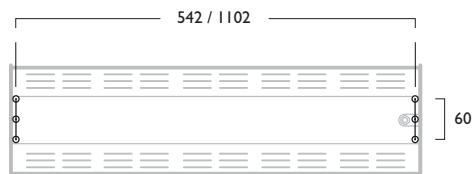

GR Gripple

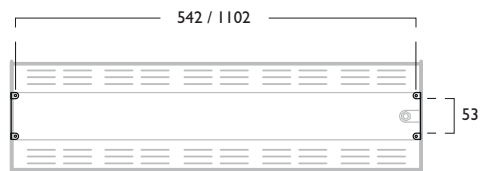

SM Surface

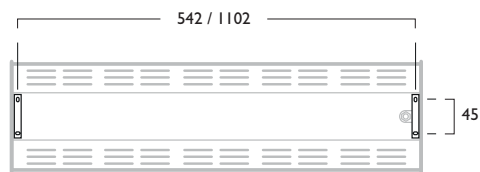

TM Trunking

