



PIR version shown

Vertigo® Duet Linear



LED

136W LED 1623 LED 136 + 463

LED & PIR

136W LED 1626 LED 136 + 463


PIR versions not suitable for use with Gear Types J, K, L and M

Control Devices




Microwave/PIR Controller

CD1602 X PIR000

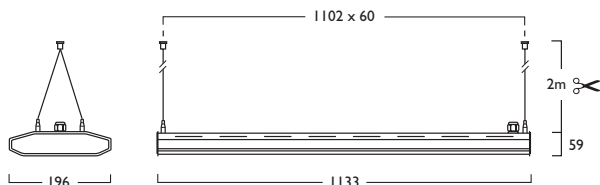

230V IP 20 ϕ 1102 x 60mm 4.7 kg Ta 40°C



- Available in a choice of lumen outputs delivering upto 23,894 lumens
- Efficacies up to 126 lm/W
- Wide beam refractor (82°) as standard, ideally suited to Warehouse and Superstore applications
- Optional extra wide beam refractor (112°) for general illumination
- Suitable for ambient temperatures up to 40°C
- Life expectancy in excess of 72,000 hours (L80 B10) at 25°C ambient and 70,000 hours (L80 B10) at 40°C ambient
- Colour stability within 3 MacAdams
- The PIR Detector defaults can be modified with the use of the Hand Held Controller (contact Technical for advice)
- Versatile installation solutions include Suspended, Surface, Trunking and Gripple. (Gripple and Trunking not supplied with fixings)
- Suspension versions supplied with 2 x 2m Suspensions and chrome clutches as standard
- IK08 Compliant
- Wireless Lighting Control available, see Connected video for full overview

PN Pendant GR Gripple SM Surface TM Trunking

NB: Gripple and Trunking versions not supplied with fixings. Gripple versions can be used for chain mounting.

Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Reflector Option

546 2x ExtraWide Beam 466

144 2x 5m Twin Suspensions (Wires only)




Duet Linear | 133 x 196 x 59mm


Vertigo® Duet Linear

3	Warm White LED (3000K)	CRI 80 136W	Lumen Output	22723 lm
			LOR	0.80
			CRI	80
			Total Power	151W
			Power Factor	0.95
			Running Current	0.62A
			Inrush Current (Std)	50.5A (176us)
			Inrush Current (Dim)	17.7A (162us)
			Efficacy	120 lm/W
			Emergency Output (BLF)	380 lm (2%)
4	Neutral White LED (4000K)	CRI 80 136W	Lumen Output	23894 lm
			LOR	0.80
			CRI	80
			Total Power	151W
			Power Factor	0.95
			Running Current	0.62A
			Inrush Current (Std)	50.5A (176us)
			Inrush Current (Dim)	17.7A (162us)
			Efficacy	126 lm/W
			Emergency Output (BLF)	400 lm (2%)

Photometrics

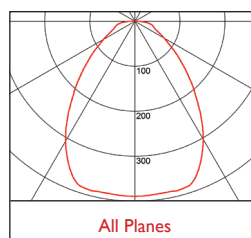

463 DLOR: 0.80

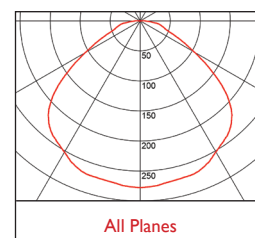

466 DLOR: 0.80

Suspensions and Mounting details shown over

Vertigo® Duet Linear Suspensions & Mounting


Fixing Types

PN Pendant

GR Gripple

SM Surface


TM Trunking

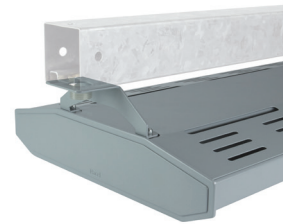


Fixing Centres

Duet / Duet Linear


PN Suspended

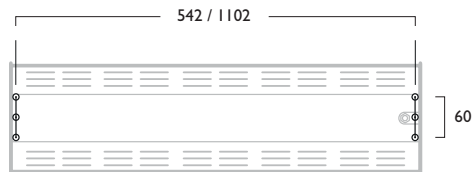

GR Gripple

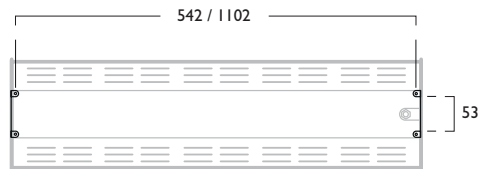

SM Surface

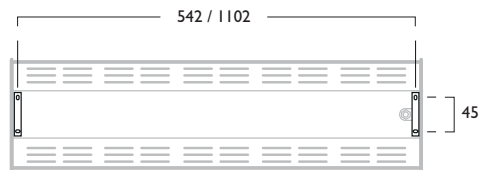

TM Trunking

