




PIR version shown

Vertigo® Quad Linear



LED

272W LED PN1627 LED 272 + 467

LED & PIR

272W LED PN1628 LED 272 + 467


PIR versions not suitable for use with Gear Types J, K, L and M

Control Devices


Microwave/PIR Controller



CD1602 X PIR000

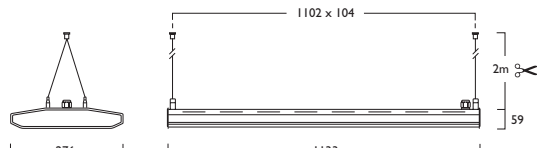

230V 50Hz IP 20 1102 x 104mm 6.9 kg Ta 40°C



- Available in a choice of lumen outputs delivering up to 46,400 lumens
- Efficacies up to 122 lm/W
- Wide beam refractor (82°) as standard, ideally suited to Warehouse and Superstore applications
- Optional Extra Wide beam refractor (112°) for general illumination
- Suitable for ambient temperatures up to 40°C
- Life expectancy in excess of 72,000 hours (L80 B10) at 25°C ambient and 70,000 hours (L80 B10) at 40°C ambient
- Colour stability within 3 MacAdams
- The PIR Detector defaults can be modified with the use of the Hand Held Controller (contact Technical for advice)
- Versatile installation solutions include Suspended, Surface, Trunking and Gripple. (Gripple and Trunking not supplied with fixings)
- Suspension versions supplied with 2 x 2m Suspensions and chrome clutches as standard
- IK08 Compliant
- Wireless Lighting Control available, see Connected video for full overview

PN Pendant GR Gripple SM Surface TM Trunking

NB: Gripple and Trunking versions not supplied with fixings. Gripple versions can be used for chain mounting.

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Refractor Option

547 2x Extra Wide Beam 468

144 2x 5m Twin Suspensions (Wires only)




Quad Linear | 133 x 276 x 59mm


Vertigo® Quad Linear

3	Warm White LED (3000K)	CRI 80	272W
		Lumen Output	44336 lm
		LOR	0.80
		CRI	80
		Total Power	302.0W
		Power Factor	0.95
		Running Current	1.26A
		Inrush Current (Std)	101.0A (176us)
		Inrush Current (Dim)	35.4A (162us)
		Efficacy	117 lm/W
		Emergency Output (BLF)	443 lm (1%)
4	Neutral White LED (4000K)	CRI 80	272W
		Lumen Output	46400 lm
		LOR	0.80
		CRI	80
		Total Power	302.0W
		Power Factor	0.94
		Running Current	1.26A
		Inrush Current (Std)	101.0A (176us)
		Inrush Current (Dim)	35.4A (162us)
		Efficacy	122 lm/W
		Emergency Output (BLF)	464 lm (1%)

Photometrics



467 DLOR: 0.80



468 DLOR: 0.80

Suspensions and Mounting details shown over

Vertigo® Quad Linear Suspensions & Mounting


Fixing Types

PN Pendant

GR Gripple

SM Surface

TM Trunking

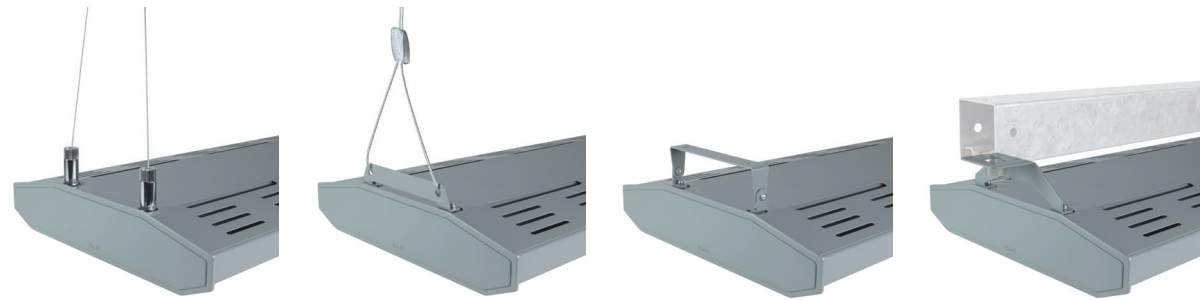


PRODUCT INFORMATION


Fixing Centres

Quad / Quad Linear


PN Suspended

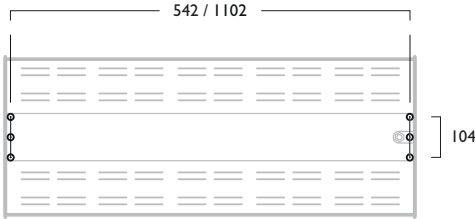

GR Gripple

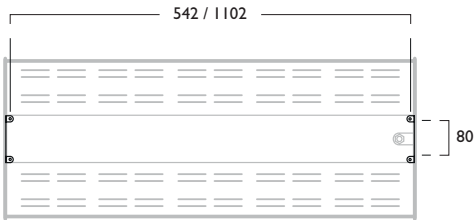

SM Surface

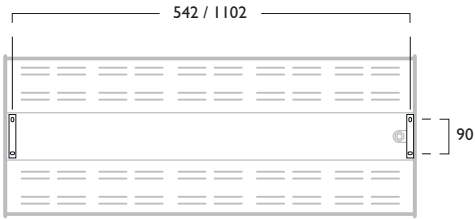

TM Trunking

