



	CRI 80	51W	59W	78W
3 Warm White LED (3000K)				
Lumen Output		6402 lm	7372 lm	9700 lm
LOR		0.72	0.72	0.72
CRI		80	80	80
Total Power		57.3W	65.4W	86.0W
Power Factor		0.95	0.95	0.95
Running Current		0.26A	0.30A	0.39A
Inrush Current (Std)		25.0A	32.0A	32.0A
Inrush Current (Dim)		48.0A	48.0A	48.0A
Efficacy		80 lm/W	81 lm/W	81 lm/W
Emergency Output (BLF)		N/A	N/A	N/A
4 Neutral White LED (4000K)				
Lumen Output		6435 lm	7410 lm	9750 lm
LOR		0.72	0.72	0.72
CRI		80	80	80
Total Power		57.3W	65.4W	86.0W
Power Factor		0.95	0.95	0.95
Running Current		0.26A	0.30A	0.39A
Inrush Current (Std)		25.0A	32.0A	32.0A
Inrush Current (Dim)		48.0A	48.0A	48.0A
Efficacy		80 lm/W	81 lm/W	81 lm/W
Emergency Output (BLF)		N/A	N/A	N/A

Explora® Halo Direct Indirect



LED CRI 80

51W	LED	Micro	PN1103	LED	51	+	481
59W	LED	Midi	PN1104	LED	59	+	482
78W	LED	Maxi	PN1105	LED	78	+	483

- Elegant LED circular pendant with Chrome feature
- Available in Maxi, Midi and Micro sizes
- Lumen outputs from 6402 to 9750 lumens
- Efficacies of up to 81 lm/W, CRI 80
- Life expectancy of 50,000hrs (L80 B10)
- Colour stability within 3 MacAdams
- Colour options apply to Driver Housing
- Wireless Lighting Control available, see Connected video for full overview

- A** Integral Driver/Remote
- J** Switch Dim
- S** DALI Dim
- L** DALI Bluetooth


■ **3** Warm (3000K) ■ **4** Neutral (4000K)

■ **1** White (RAL 9010) ■ **2** Urban Graphite (RAL 7046) ■ **3** Black (RAL 9005) *Colour options apply to Driver Housing*

■ **264** 3x 5m Suspensions (wires only)




Explora® Halo Direct Indirect

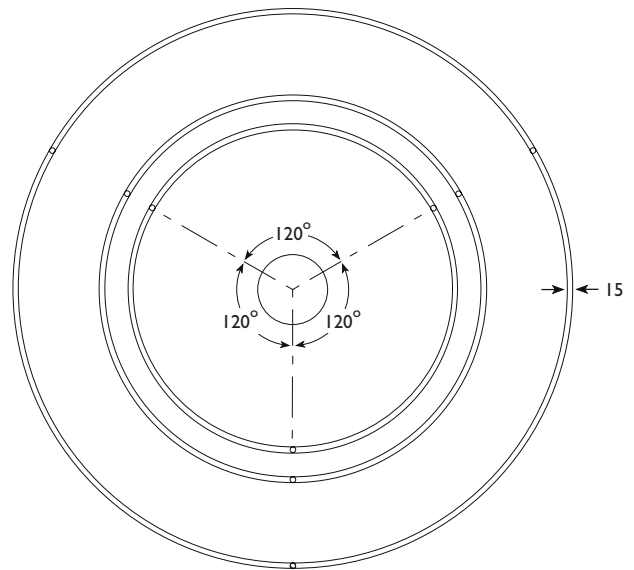

230V 50Hz	IP 20	Maxi 1603mm Ø	Midi 1221mm Ø	Micro 1062mm Ø	Maxi 5.7 kg	Midi 4.8 kg	Micro 4.4 kg	Gear Housing 375mm
--------------	-----------------	------------------	------------------	-------------------	----------------	----------------	-----------------	-----------------------

Photometrics

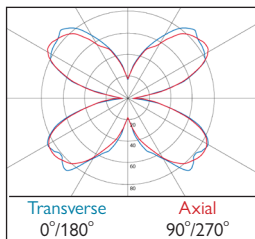

481-483 ULOR: 0.36 DLOR: 0.36