

	CRI 80	20W	27W	30W	41W
<b>3 Warm White LED (3000K)</b>					
Lumen Output		3556 lm	4582 lm	5334 lm	6873 lm
LOR		0.81	0.81	0.81	0.81
CRI		80	80	80	80
Total Power		20.8W	28.2W	30.8W	42.0W
Power Factor		0.98	0.98	0.99	0.99
Running Current		0.09A	0.13A	0.14A	0.18A
Inrush Current (Std)		32.0A (240us)	32.0A (240us)	30.0A (253us)	30.0A (253us)
Inrush Current (Dim)		29.0A (180us)	29.0A (180us)	23.0A (174us)	23.0A (174us)
Efficacy		138 lm/W	131 lm/W	140 lm/W	132 lm/W
Emergency Output (BLF)		497 lm (14%)	458 lm (10%)	480 lm (9%)	481 lm (7%)
<b>4 Neutral White LED (4000K)</b>					
Lumen Output		3720 lm	4794 lm	5580 lm	7191 lm
LOR		0.81	0.81	0.81	0.81
CRI		80	80	80	80
Total Power		20.8W	28.2W	30.8W	42.0W
Power Factor		0.98	0.98	0.99	0.99
Running Current		0.09A	0.13A	0.14A	0.18A
Inrush Current (Std)		32.0A (240us)	32.0A (240us)	30.0A (253us)	30.0A (253us)
Inrush Current (Dim)		29.0A (180us)	29.0A (180us)	23.0A (174us)	23.0A (174us)
Efficacy		144 lm/W	137 lm/W	146 lm/W	138 lm/W
Emergency Output (BLF)		520 lm (14%)	479 lm (10%)	502 lm (9%)	503 lm (7%)

## Linara® Pendant



### CRI 80

#### LED

Power	LED	Length	PN	LED	LED	LED	LED	+	+	+
20W	LED	1144mm	PN 499	LED	20	27	30	41	+	488
27W	LED	1144mm	PN 499	LED	20	27	30	41	+	488
30W	LED	1704mm	PN 500	LED	20	27	30	41	+	489
41W	LED	1704mm	PN 500	LED	20	27	30	41	+	489

#### LED & PIR

Power	LED	Length	PN	LED	LED	LED	LED	+	+	+
20W	LED	1144mm	PN 1108	LED	20	27	30	41	+	488
27W	LED	1144mm	PN 1108	LED	20	27	30	41	+	488
30W	LED	1704mm	PN 1109	LED	20	27	30	41	+	489
41W	LED	1704mm	PN 1109	LED	20	27	30	41	+	489

PIR versions not suitable for use with Gear Types J, K, L and M

#### Control Devices



PIR Handset

CD1602 **X** PIR000

PN Suspended

Gear type F & G must be operated through a DSI


<b>A</b> Integral Driver/Remote	<b>S</b> DALI Dim
<b>E</b> Emergency	<b>T</b> DALI Dim + Emergency
<b>F</b> Digital Dim	<b>C</b> DALI Dim + DALI Emergency
<b>G</b> Digital Dim + Emergency	<b>L</b> DALI Bluetooth
<b>J</b> Switch Dim	<b>M</b> DALI Bluetooth + Emergency
<b>K</b> Switch Dim + Emergency	

3 Warm (3000K) 4 Neutral (4000K)



1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

331 2x 5m Suspension (wire only)

- Lumen outputs from 3556 to 7191 lumens
- Efficacies up to 146 lm/W
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- The PIR Detector defaults can be modified with the use of the Handset (contact Technical for advice)
- Supplied with 2 x 2m Suspensions and chrome clutches as standard
- Complementary Surface versions are available
- Wireless Lighting Control available, see Connected video for full overview

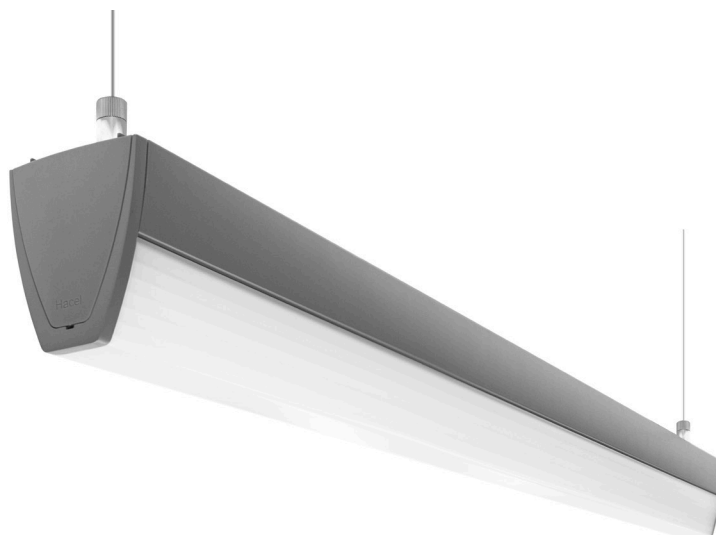

## Linara® Pendant

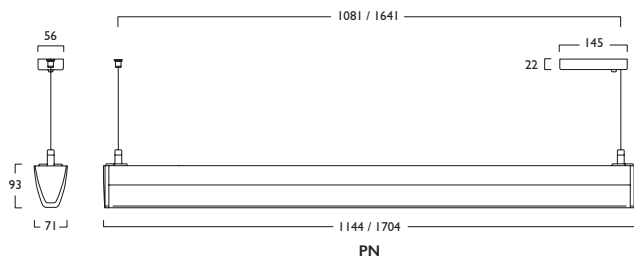

230V  
 50Hz


**IP**  
 20

3.8 kg  
 1144mm

5.2 kg  
 1704mm

⌀  
 1081 / 1641mm  
**PN**

### Photometrics

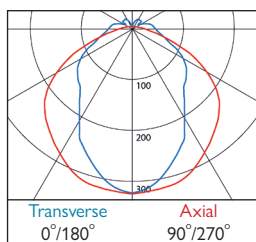

488 - 489 DLOR: 0.81