


Linear Light5


UGR Direct Indirect

Link & Solo Suspended


- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 4x 2m Wire Suspensions
- Wireless Lighting Control available, see Connected video for full overview

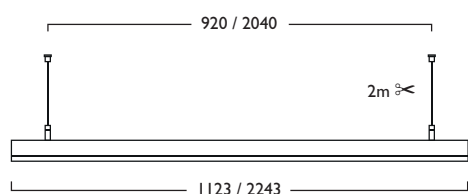


Link Suspended




Direct Indirect




L Module (Left)
1128/2248mm




L Module (Right)
1128/2248mm

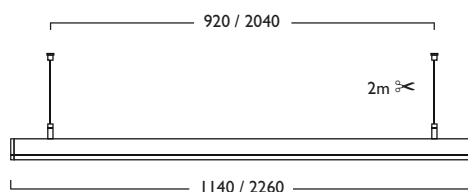


Solo Suspended




Direct Indirect



T Module (Left)
1123/2243mm



T Module (Right)
1123/2243mm



X Module
1123/2243mm

Viewed from above



Linear Light⁵ UGR Direct Indirect

Link & Solo Modules

	☀	☒	☒	☒	☒	☒	☒	☒	☒
LED									
40W LED	1123mm	LB 1027	LED	40	—	+	496		
79W LED	2243mm	LB 1051	LED	79	—	+	497		

Link L Modules (Left)

LED									
40W LED	1128mm	LB 1031	LED	40	—	+	496		
79W LED	2248mm	LB 1055	LED	79	—	+	497		

Link L Modules (Right)

LED									
40W LED	1128mm	LB 1035	LED	40	—	+	496		
79W LED	2248mm	LB 1059	LED	79	—	+	497		

Link T Modules (Left)

	☀	☒	☒	☒	☒	☒	☒	☒	☒
LED									
40W LED	1123mm	LB 1039	LED	40	—	+	496		
79W LED	2243mm	LB 1063	LED	79	—	+	497		

Link T Modules (Right)

LED									
40W LED	1123mm	LB 1043	LED	40	—	+	496		
79W LED	2243mm	LB 1067	LED	79	—	+	497		

Link X Modules

LED									
40W LED	1123mm	LB 1047	LED	40	—	+	496		
79W LED	2243mm	LB 1071	LED	79	—	+	497		

X Modules not available in Emergency Gear Types

230V 50Hz **IP20** **LB, LE** 920 X 80mm 2040 X 80mm 7.7 kg 15.4 kg

- Contemporary LED Module with high quality Micro Prism refractor offering UGR 16.7
- Available in a choice of lumen outputs, delivering up to 14832 lumens
- Efficacies up to 119 lm/W
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- 4x 2m suspension wires and chrome clutches for ease of adjustment
- Wireless Lighting Control available, see Connected video for full overview

LB Link Suspended (Direct/Indirect) **LE** Solo Suspended (Direct/Indirect)

Gear types F & G must be operated through a DSI

A Integral Driver/Remote
E Emergency
F Digital Dim
G Digital Dim + Emergency
J Switch Dim
K Switch Dim + Emergency
S DALI Dim
T DALI Dim + Emergency
C DALI Dim + DALI Emergency
L DALI Bluetooth
M DALI Bluetooth + Emergency

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

556 4x 5m Suspensions (wires only)
557 2x 2m Single point, twin suspensions (wires only)
144 2x 5m Single point, twin suspensions (wires only)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

Hacel[®]
 Fluent in Lighting




Linear Light5 UGR Direct Indirect

3	Warm White LED (3000K)	CRI 80	40W	79W
	Lumen Output		6873 lm	13746 lm
	LOR		0.70	0.70
	CRI		80	80
	Total Power		42.0W	84.0W
	Power Factor		0.98	0.98
	Running Current		0.19A	0.37A
	Inrush Current		57.7A (217us)	115.4A (217us)
	Efficacy		114 lm/W	114 lm/W
	Emergency Output (BLF)		595 lm (13%)*	595 lm (6.5%)*

4	Neutral White LED (4000K)	CRI 80	40W	79W
	Lumen Output		7191 lm	14382 lm
	LOR		0.70	0.70
	CRI		80	80
	Total Power		42.0W	84.0W
	Power Factor		0.98	0.98
	Running Current		0.19A	0.37A
	Inrush Current		57.7A (217us)	115.4A (217us)
	Efficacy		119 lm/W	119 lm/W
	Emergency Output (BLF)		623 lm (13%)*	623 lm (6.5%)*

* % of Direct illumination



496-497 DLOR: 0.51 ULOR: 0.19