


3	Warm White LED (3000K)	CRI 80				CRI 90			
		6W	10W	15W	20W	6W	10W	15W	20W
	Lumen Output	1026 lm	1748 lm	2581 lm	3390 lm	869 lm	1480 lm	2186 lm	2872 lm
	LOR	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
	CRI	80	80	80	80	90	90	90	90
	Total Power	6.5W	11.4W	17.8W	22.8W	6.5W	11.4W	17.8W	22.8W
	Power Factor	0.92	0.95	0.90	0.96	0.92	0.95	0.90	0.96
	Running Current	0.03A	0.05A	0.09A	0.10A	0.03A	0.05A	0.09A	0.10A
	Inrush Current (Std)	17.0A (231us)	6.0A (80us)	1.5A (60us)	16.0A (229us)	17.0A (231us)	6.0A (80us)	1.5A (60us)	16.0A (229us)
	Inrush Current (Dim)	15.0A (243us)	18.0A (140us)	25.0A (141us)	25.0A (141us)	15.0A (243us)	18.0A (140us)	25.0A (141us)	25.0A (141us)
	Efficacy	145 lm/W	141 lm/W	133 lm/W	136 lm/W	122 lm/W	119 lm/W	112 lm/W	115 lm/W
	Emergency Output (BLF)	471 (46%)	454 (26%)	412 (16%)	440 (13%)	399 (46%)	384 (26%)	349 (16%)	373 (13%)

4	Neutral White LED (4000K)	CRI 80				CRI 90			
		6W	10W	15W	20W	6W	10W	15W	20W
	Lumen Output	1070 lm	1822 lm	2691 lm	3535 lm	913 lm	1556 lm	2297 lm	3018 lm
	LOR	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
	CRI	80	80	80	80	90	90	90	90
	Total Power	6.5W	11.4W	17.8W	22.8W	6.5W	11.4W	17.8W	22.8W
	Power Factor	0.92	0.95	0.90	0.96	0.92	0.95	0.90	0.96
	Running Current	0.03A	0.05A	0.09A	0.10A	0.03A	0.05A	0.09A	0.10A
	Inrush Current (Std)	17.0A (231us)	6.0A (80us)	1.5A (60us)	16.0A (229us)	17.0A (231us)	6.0A (80us)	1.5A (60us)	16.0A (229us)
	Inrush Current (Dim)	15.0A (243us)	18.0A (140us)	25.0A (141us)	25.0A (141us)	15.0A (243us)	18.0A (140us)	25.0A (141us)	25.0A (141us)
	Efficacy	151 lm/W	147 lm/W	139 lm/W	142 lm/W	129 lm/W	125 lm/W	118 lm/W	121 lm/W
	Emergency Output (BLF)	492 (46%)	473 (26%)	430 (16%)	459 (13%)	419 (46%)	404 (26%)	367 (16%)	392 (13%)

Soledo® Square Midi

LED CRI 80		LED CRI 90	
6W	LED ID1099	LED ID1100	06
10W	LED ID1099	LED ID1100	10
15W	LED ID1099	LED ID1100	15
20W	LED ID1099	LED ID1100	20

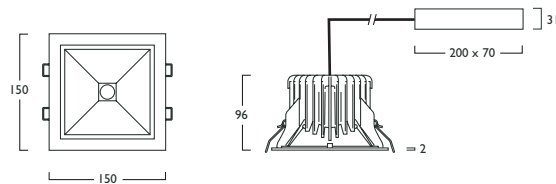

230V 50Hz IP20 140mm x 140mm 0.9 kg

- Class leading LED Square Downlighter
- Exceptional engineering and thermal management
- Choice of lumen outputs, delivering up to 3535 lumens
- Efficacies up to 151 lm/W
- Life expectancy in excess of 50,000 hours (L90 B10)
- CRI 80 and CRI 90 versions available, colour stability within 3 MacAdams
- Emergency versions available
- Wireless Lighting Control available, see Connected video for full overview


Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)


Glass Options

- 549 Flush Clear
- 558 Flush Etched

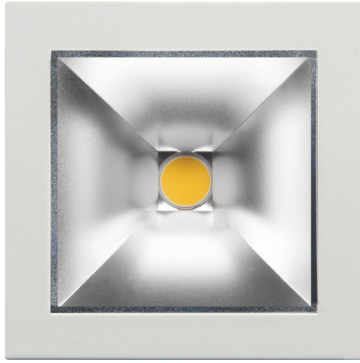

Soledo[®] Square Midi

Photometrics



477-478 DLOR: 0.92