

	CRI 80				CRI 90			
	6W	10W	15W	20W	6W	10W	15W	20W
3 Warm White LED (3000K)								
Lumen Output	1009 lm	1682 lm	2462 lm	3211 lm	855 lm	1425 lm	2085 lm	2719 lm
LOR	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
CRI	80	80	80	80	90	90	90	90
Total Power	6.8W	11.6W	18.0W	23.3W	6.8W	11.6W	18.0W	23.3W
Power Factor	0.92	0.95	0.90	0.96	0.92	0.95	0.90	0.96
Running Current	0.03A	0.05A	0.09A	0.11A	0.03A	0.05A	0.09A	0.11A
Inrush Current	17.0A (231us)	6.0A (80us)	15.0A (60us)	16.0A (229us)	17.0A (231us)	6.0A (80us)	15.0A (60us)	16.0A (229us)
Efficacy	136 lm/W	133 lm/W	125 lm/W	126 lm/W	115 lm/W	113 lm/W	106 lm/W	107 lm/W
Emergency Output (BLF)	443 (44%)	430 (25%)	393 (16%)	385 (12%)	376 (44%)	356 (25%)	333 (16%)	326 (12%)
4 Neutral White LED (4000K)								
Lumen Output	1053 lm	1754 lm	2567 lm	3348 lm	917 lm	1528 lm	2236 lm	2916 lm
LOR	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
CRI	80	80	80	80	90	90	90	90
Total Power	6.8W	11.6W	18.0W	23.3W	6.8W	11.6W	18.0W	23.3W
Power Factor	0.92	0.95	0.90	0.96	0.92	0.95	0.90	0.96
Running Current	0.03A	0.05A	0.09A	0.11A	0.03A	0.05A	0.09A	0.11A
Inrush Current	17.0A (231us)	6.0A (80us)	15.0A (60us)	16.0A (229us)	17.0A (231us)	6.0A (80us)	15.0A (60us)	16.0A (229us)
Efficacy	142 lm/W	139 lm/W	131 lm/W	132 lm/W	124 lm/W	121 lm/W	114 lm/W	115 lm/W
Emergency Output (BLF)	463 (44%)	438 (25%)	410 (16%)	401 (12%)	403 (44%)	382 (25%)	357 (16%)	349 (12%)


Soledo® Square Midi

LED CRI 80

Power	LED	ID	LED	06	10	15	20	Price
6W	LED	ID1099	LED	06	+	+	+	477
10W	LED	ID1099	LED	10	+	+	+	477
15W	LED	ID1099	LED	15	+	+	+	477
20W	LED	ID1099	LED	20	+	+	+	477

LED CRI 90

Power	LED	ID	LED	06	10	15	20	Price
6W	LED	ID1100	LED	06	+	+	+	478
10W	LED	ID1100	LED	10	+	+	+	478
15W	LED	ID1100	LED	15	+	+	+	478
20W	LED	ID1100	LED	20	+	+	+	478

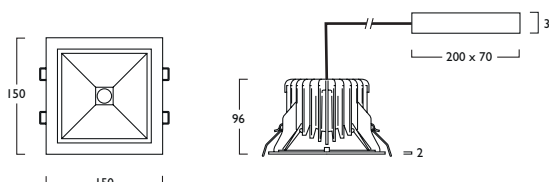

230V 50Hz IP20 140mm x 140mm 0.9 kg

- Class leading LED Square Downlighter
- Exceptional engineering and thermal management
- Choice of lumen outputs, delivering up to 3348 lumens
- Efficacies up to 142 lm/W
- Life expectancy in excess of 51,000 hours (L80 B10)
- CRI 80 and CRI 90 versions available, colour stability within 3 MacAdams
- Emergency versions available

Gear types F & G must be operated through a DSI

- A Integral Driver
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Glass Options


- 549 Flush Clear
- 558 Flush Etched

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

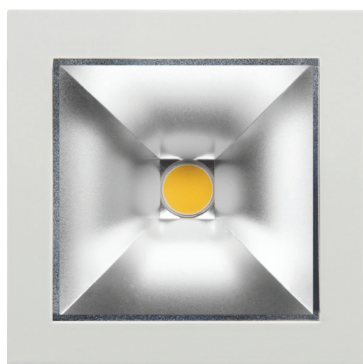

Soledo[®] Square Midi

Photometrics

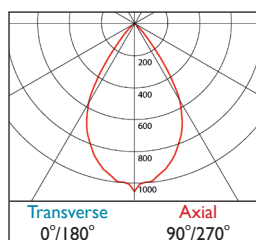

477-478 DLOR: 0.92