

230V 50Hz IP20 50mm 1.9 kg

Chyme® Cylo

LED	7W	7W	7W	PN	PN	PN	LED	LED	LED	LED	+	+	+
	440	720	1005	1166	1168	1170	07	07	07	-	-	-	504
													506
													508

Chyme® Accent

LED	7W	7W	7W	PN	PN	PN	LED	LED	LED	LED	+	+	+
	485	764	1051	1172	1174	1176	07	07	07	-	-	-	504
													506
													508

- Slim, contemporary LED Pendant available in a choice of 3 lengths and 2 design options
- Lumen outputs from 1148 to 1187 lumens
- Efficacies of up to 102 lm/W
- Single point Zhaga Book 3 LED
- Life expectancy in excess of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- A range of specialist finishes available on request, including: Copper Metallic, Anthracite Metallic, Anodic Malachite, Anodic Gold and Pearl Gentian Blue Metallic
- Wireless Lighting Control available, see Connected video for full overview

Gear type F & G must be operated through a DSI

- A Integral Driver/Remote
- F Digital Dim
- J Switch Dim
- S DALI Dim
- L DALI Bluetooth


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

- 561 5m Suspension (wire only)
- 562 Connector Housing

3	Warm White LED (3000K)	CRI 80	7W
	Lumen Output		1148 lm
	LOR		0.63
	CRI		80
	Total Power		7.3W
	Power Factor		0.95
	Running Current		0.03A
	Inrush Current (Std)		21.0A (126us)
	Inrush Current (Dim)		13.6A (304us)
	Efficacy		99 lm/W
	Emergency Output (BLF)		N/A

4	Neutral White LED (4000K)	CRI 80	7W
	Lumen Output		1187 lm
	LOR		0.63
	CRI		80
	Total Power		7.3W
	Power Factor		0.95
	Running Current		0.03A
	Inrush Current (Std)		21.0A (126us)
	Inrush Current (Dim)		13.6A (304us)
	Efficacy		102 lm/W
	Emergency Output (BLF)		N/A

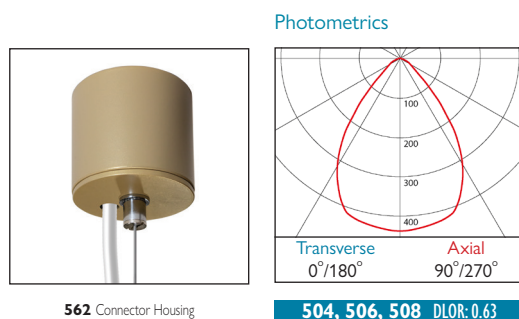

562 Connector Housing