




iMod® Inset Grid

LED

24W	LED	IM1197	LED	24	546
29W	LED	IM1197	LED	29	546
36W	LED	IM1197	LED	36	546

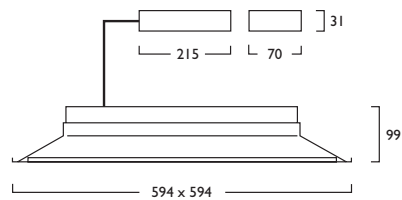

230V
50Hz

IP
44

5.0 kg


Designed for 15mm and 25mm T grid ceilings

3	Warm White LED (3000K)	CRI 80	24W	29W	36W
	Lumen Output		3412 lm	4023 lm	4797 lm
	LOR		0.84	0.84	0.84
	CRI		80	80	80
	Total Power		26.7W	32.4W	40.3W
	Power Factor		0.95	0.95	0.95
	Running Current		0.12A	0.15A	0.18A
	Inrush Current (Std)		24.7A (268us)	24.7A (268us)	24.7A (268us)
	Inrush Current (Dim)		28.0A (195us)	28.0A (195us)	28.0A (195us)
	Efficacy		107 lm/W	104 lm/W	99 lm/W
	Emergency Output (BLF)		375 lm (11%)	362 lm (9%)	335 lm (7%)
4	Neutral White LED (4000K)	CRI 80	24W	29W	36W
	Lumen Output		3720 lm	4387 lm	5231 lm
	LOR		0.84	0.84	0.84
	CRI		80	80	80
	Total Power		26.7W	32.4W	40.3W
	Power Factor		0.95	0.95	0.95
	Running Current		0.12A	0.15A	0.18A
	Inrush Current (Std)		24.7A (268us)	24.7A (268us)	24.7A (268us)
	Inrush Current (Dim)		28.0A (195us)	28.0A (195us)	28.0A (195us)
	Efficacy		117 lm/W	113 lm/W	109 lm/W
	Emergency Output (BLF)		409 lm (11%)	394 lm (9%)	366 lm (7%)

LG7 in accordance with SLL Code for Lighting 2012*

- High quality Micro Prism refractor offering UGR <19
- Available in a choice of lumens outputs up to 5231 lumens
- Efficacies up to 117 lm/W
- Life expectancy in excess of 50,000 hours (L90 B10)
- IP44 Rated (Front face only)
- Colour stability within 3 MacAdams
- Wide choice of high quality control gear
- TP(b) rated as standard
- Wireless Lighting Control available, see Connected video for full overview

Photometrics



Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales