



## Aart® Midi



LED CRI 80

Surface

14W	LED	IS1274	LED	14	587
21W	LED	IS1274	LED	21	587
25W	LED	IS1274	LED	25	587

Three Circuit Track

14W	LED	TT1274	LED	14	587
21W	LED	TT1274	LED	21	587
25W	LED	TT1274	LED	25	587

DALI Track

14W	LED	TD1274	LED	14	587
21W	LED	TD1274	LED	21	587
25W	LED	TD1274	LED	25	587



LED CRI 90

Surface

14W	LED	IS1275	LED	14	588
21W	LED	IS1275	LED	21	588
25W	LED	IS1275	LED	25	588


Three Circuit Track

14W	LED	TT1275	LED	14	588
21W	LED	TT1275	LED	21	588
25W	LED	TT1275	LED	25	588


DALI Track

14W	LED	TD1275	LED	14	588
21W	LED	TD1275	LED	21	588
25W	LED	TD1275	LED	25	588

TT versions not suitable for use with Gear Types J & S  
TD versions not suitable for use with Gears Type A & L

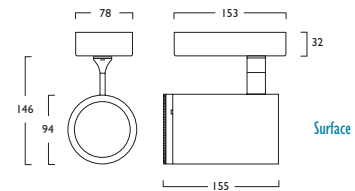

230V 50Hz IP 20 90° 347° 130 x 50mm 1.6 kg

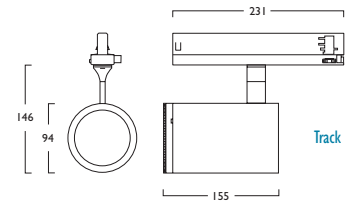

230V 50Hz IP 20 90° 347° 1.6 kg

- Ideally suited to Museums, Art Galleries and Retail applications
- Adjustable beam angle from 10° (Narrow) to 60° (Wide)
- Available in a choice of lumen outputs up to 3845 lumens
- Life expectancy in excess of 55,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Protective glass fitted as standard
- DALI Track versions are eminently suited to diverse, adaptable lighting scenarios. The Track requires the relevant dimming wiring
- Wireless Lighting Control available, see Connected video for full overview

A Integral Driver/Remote

J Switch Dim

S DALI Dim

L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk)

V3 - 06/2023

**Hacel**<sup>®</sup>  
Fluent in Lighting



## Aart® Midi

	CRI 80			CRI 90		
	14W	21W	25W	14W	21W	25W
<b>3 Warm White LED (3000K)</b>						
Lumen Output	2223 lm	3237 lm	3720 lm	1826 lm	2658 lm	3056 lm
LOR	0.68	0.68	0.68	0.68	0.68	0.68
CRI	80	80	80	90	90	90
Total Power	15.8W	24.7W	28.8W	15.8W	24.7W	28.8W
Power Factor	0.95	0.95	0.95	0.95	0.95	0.95
Running Current	0.07A	0.11A	0.13A	0.07A	0.11A	0.13A
Inrush Current (Std)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)
Inrush Current (Dim)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)
Efficacy	95 lm/W	89 lm/W	87 lm/W	78 lm/W	73 lm/W	72 lm/W
Emergency Output (BLF)	N/A	N/A	N/A	N/A	N/A	N/A
<b>4 Neutral White LED (4000K)</b>						
Lumen Output	2298 lm	3345 lm	3845 lm	1922 lm	2900 lm	3333 lm
LOR	0.68	0.68	0.68	0.68	0.68	0.68
CRI	80	80	80	90	90	90
Total Power	15.8W	24.7W	28.8W	15.8W	24.7W	28.8W
Power Factor	0.95	0.95	0.95	0.95	0.95	0.95
Running Current	0.07A	0.11A	0.13A	0.07A	0.11A	0.13A
Inrush Current (Std)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)
Inrush Current (Dim)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)
Efficacy	98 lm/W	92 lm/W	90 lm/W	82 lm/W	79 lm/W	78 lm/W
Emergency Output (BLF)	N/A	N/A	N/A	N/A	N/A	N/A

### Photometrics

