



	CRI 80	19W	33W	46W
3 Warm White LED (3000K)				
Lumen Output	3604 lm	5874 lm	7956 lm	
LOR	0.86	0.86	0.86	
CRI	80	80	80	
Total Power	20.5W	35.9W	51.0W	
Power Factor	0.98	0.95	0.95	
Running Current	0.09A	0.16A	0.23A	
Inrush Current (Std)	32.0A (240us)	11.0A (38us)	15.0A (100us)	
Inrush Current (Dim)	22.4A (176us)	22.4A (176us)	22.4A (176us)	
Efficacy	151 lm/W	140 lm/W	134 lm/W	
Emergency Output (BLF)	504 lm (14%)	469 lm (8%)	477 lm (6%)	
4 Neutral White LED (4000K)				
Lumen Output	3772 lm	6146 lm	8326 lm	
LOR	0.86	0.86	0.86	
CRI	80	80	80	
Total Power	20.5W	35.9W	51.0W	
Power Factor	0.98	0.95	0.95	
Running Current	0.09A	0.16A	0.23A	
Inrush Current (Std)	32.0A (240us)	11.0A (38us)	15.0A (100us)	
Inrush Current (Dim)	22.4A (176us)	22.4A (176us)	22.4A (176us)	
Efficacy	158 lm/W	147 lm/W	140 lm/W	
Emergency Output (BLF)	528 lm (14%)	491 lm (8%)	499 lm (6%)	


- Glass Reinforced Polyester housing (Light Grey RAL 7035)
- Injection moulded opal Polycarbonate diffuser with stainless steel clips
- IP66 and IK08 rated, suitable for exterior use under canopy
- Suitable for trunking mounting through 20mm knockouts
- Available in a choice of lumen output up to 8326 lumens
- Efficacies upto 158 lm/W
- Life expectancy 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Complementary Surface version
- Wireless Lighting Control available, see Connected video for full overview

Aviata Pendant




LED

Power	LED	PN1222	LED	19	+	561
19W	LED	PN1222	LED	19	+	561
33W	LED	PN1222	LED	33	+	561
46W	LED	PN1222	LED	46	+	561

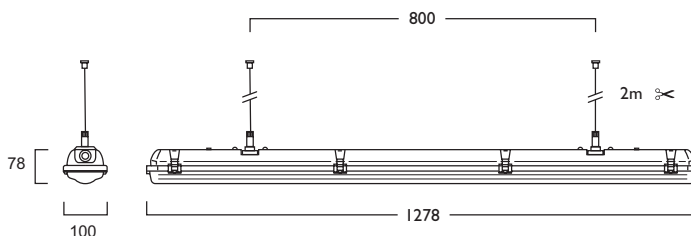

230V 50Hz IP66 IK08 3.4 kg

Photometrics



Gear types F & G must be operated through a DSI

- A Integral Driver
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

331 2x 5m Suspension (wire only)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk