



3	Warm White LED (3000K)	CRI 80	19W	33W	46W
	Lumen Output		3604 lm	5874 lm	7956 lm
	LOR		0.86	0.86	0.86
	CRI		80	80	80
	Total Power		20.5W	35.9W	51.0W
	Power Factor		0.98	0.95	0.95
	Running Current		0.09A	0.16A	0.23A
	Inrush Current (Std)		32.0A (240us)	11.0A (38us)	15.0A (100us)
	Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	22.4A (176us)
	Efficacy		151 lm/W	140 lm/W	134 lm/W
	Emergency Output (BLF)		504 lm (14%)	469 lm (8%)	477 lm (6%)
4	Neutral White LED (4000K)	CRI 80	19W	33W	46W
	Lumen Output		3772 lm	6146 lm	8326 lm
	LOR		0.86	0.86	0.86
	CRI		80	80	80
	Total Power		20.5W	35.9W	51.0W
	Power Factor		0.98	0.95	0.95
	Running Current		0.09A	0.16A	0.23A
	Inrush Current (Std)		32.0A (240us)	11.0A (38us)	15.0A (100us)
	Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	22.4A (176us)
	Efficacy		158 lm/W	147 lm/W	140 lm/W
	Emergency Output (BLF)		528 lm (14%)	491 lm (8%)	499 lm (6%)


- Glass Reinforced Polyester housing (Light Grey RAL 7035)
- Injection moulded opal Polycarbonate diffuser with stainless steel clips
- IP65 and IK08 rated, suitable for exterior use under canopy
- Suitable for trunking mounting through 20mm knockouts
- Available in a choice of lumen output up to 8326 lumens
- Efficacies upto 158 lm/W
- Life expectancy 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Complementary Pendant version available

Aviata Surface



LED

19W	LED	SM1222	—	LED	19	561
33W	LED	SM1222	—	LED	33	561
46W	LED	SM1222	—	LED	46	561

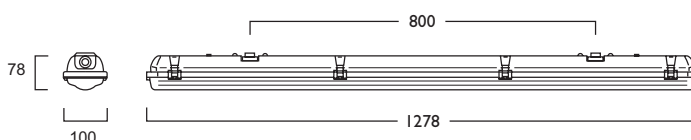

230V
50Hz


IP
65

⊕ ⊕
800mm

IK
0.8

🔧
3.4 kg

Photometrics



561 DLOR: 0.86

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

3 Warm (3000K) 4 Neutral (4000K)