



		CRI 80	22W	29W
<b>3</b>	Warm White LED (3000K)			
	Lumen Output		3705 lm	4829 lm
	LOR		0.89	0.89
	CRI		80	80
	Total Power		24.7W	32.9W
	Power Factor		0.95	0.95
	Running Current		0.11A	0.15A
	Inrush Current (Std)		8.0A (80us)	8.0A (80us)
	Inrush Current (Dim)		9.6A (34us)	9.6A (34us)
	Efficacy		133 lm/W	130 lm/W
Emergency Output (BLF)		N/A	N/A	
<b>4</b>	Neutral White LED (4000K)			
	Lumen Output		3877 lm	5053 lm
	LOR		0.89	0.89
	CRI		80	80
	Total Power		24.7W	32.9W
	Power Factor		0.95	0.95
	Running Current		0.11A	0.15A
	Inrush Current (Std)		8.0A (80us)	8.0A (80us)
	Inrush Current (Dim)		9.6A (34us)	9.6A (34us)
	Efficacy		139 lm/W	136 lm/W
Emergency Output (BLF)		N/A	N/A	

- Ultra slim luminaire with superior wallwashing illumination
- Available in a choice of lumen outputs, delivering up to 5053 lumens
- Efficacies up to 139 lm/W
- Colour stability within 3 MacAdams
- Outstanding performance with an LOR of 0.89
- Zhaga Book 7 LED
- Life expectancy in excess of 72,000 hours (L80 B10)
- DALI Track versions are eminently suited to diverse, adaptable lighting scenarios. The Track requires the relevant dimming wiring
- Wireless Lighting Control available, see Connected video for full overview

## Flite® Wallwasher




### Three Circuit Track

22W	LED	TT1208	LED	22	566
29W	LED	TT1208	LED	29	566


### DALI Track

22W	LED	TD1208	LED	22	566
29W	LED	TD1208	LED	29	566

TT versions not suitable for use with Gear Types J & S  
 TD versions not suitable for use with Gear Types A & L

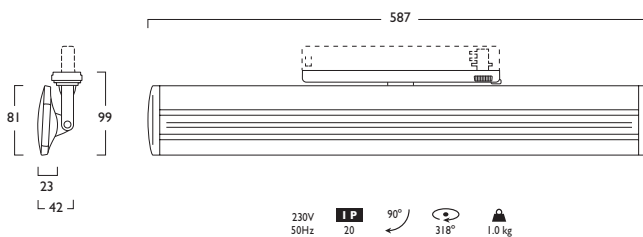

### Photometrics

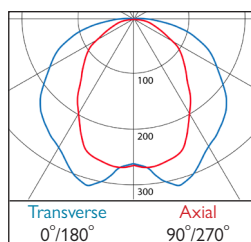

**566 DLOR: 0.89**

### Gear type F must be operated through a DSI

- A** Integral Driver
  - J** Switch Dim
  - S** DALI Dim
  - L** DALI Bluetooth
- 3** Warm (3000K)    **4** Neutral (4000K)
- 1** White (RAL 9010)    **2** Urban Graphite (RAL 7046)    **3** Black (RAL 9005)