



3	Warm White LED (3000K)	CRI 80			CRI 90		
		12W	17W	24W	12W	17W	24W
	Lumen Output	2029 lm	2856 lm	4042 lm	1719 lm	2419 lm	3424 lm
	LOR	0.81	0.81	0.81	0.81	0.81	0.81
	CRI	80	80	80	90	90	90
	Total Power	13.1W	18.2W	25.3W	13.1W	18.2W	25.3W
	Power Factor	0.90	0.90	0.95	0.90	0.90	0.95
	Running Current	0.06A	0.09A	0.12A	0.06A	0.09A	0.12A
	Inrush Current (Std)	8.0A (80us)	8.0A (80us)	8.0A (40us)	8.0A (80us)	8.0A (80us)	8.0A (40us)
	Inrush Current (Dim)	18.0A (140us)	25.0A (141us)	28.0A (195us)	18.0A (140us)	25.0A (141us)	28.0A (195us)
	Efficacy	125 lm/W	127 lm/W	129 lm/W	106 lm/W	107 lm/W	109 lm/W
	Emergency Output (BLF)	446 lm (22%)	456 lm (16%)	444 lm (11%)	378 lm (22%)	387 lm (16%)	376 lm (11%)

4	Neutral White LED (4000K)	CRI 80			CRI 90		
		12W	17W	24W	12W	17W	24W
	Lumen Output	2116 lm	2978 lm	4215 lm	1806 lm	2542 lm	3597 lm
	LOR	0.81	0.81	0.81	0.81	0.81	0.81
	CRI	80	80	80	90	90	90
	Total Power	13.1W	18.2W	25.3W	13.1W	18.2W	25.3W
	Power Factor	0.90	0.90	0.95	0.90	0.90	0.95
	Running Current	0.06A	0.09A	0.12A	0.06A	0.09A	0.12A
	Inrush Current (Std)	8.0A (80us)	8.0A (80us)	8.0A (40us)	8.0A (80us)	8.0A (80us)	8.0A (40us)
	Inrush Current (Dim)	18.0A (140us)	25.0A (141us)	28.0A (195us)	18.0A (140us)	25.0A (141us)	28.0A (195us)
	Efficacy	130 lm/W	132 lm/W	134 lm/W	111 lm/W	113 lm/W	115 lm/W
	Emergency Output (BLF)	465 lm (22%)	476 lm (16%)	463 lm (11%)	397 lm (22%)	406 lm (16%)	395 lm (11%)

Microbezel® Plus



LED CRI 80

Power	LED	ID	LED	Beam	Output	+	575
12W	LED	ID1292	LED	12	+	575	
17W	LED	ID1292	LED	17	+	575	
24W	LED	ID1292	LED	24	+	575	

LED CRI 90

Power	LED	ID	LED	Beam	Output	+	578
12W	LED	ID1293	LED	12	+	578	
17W	LED	ID1293	LED	17	+	578	
24W	LED	ID1293	LED	24	+	578	

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency


3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Reflector		CRI 80		CRI 90	
		384	385	384	385
Narrow Beam		576	579		
Wide Beam		577	580		

Polycarbonate Options - Examples Shown on page 2

- Discreet bezel for minimalistic aesthetic appearance
- Precision die-cast construction
- Single point Zhaga Book 3 LED
- Medium beam reflector as standard
- Choice of Diffuser options for customisation
- Choice of outputs up to 4215 lumens
- Efficacies up to 134 lm/W
- Life expectancy of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview

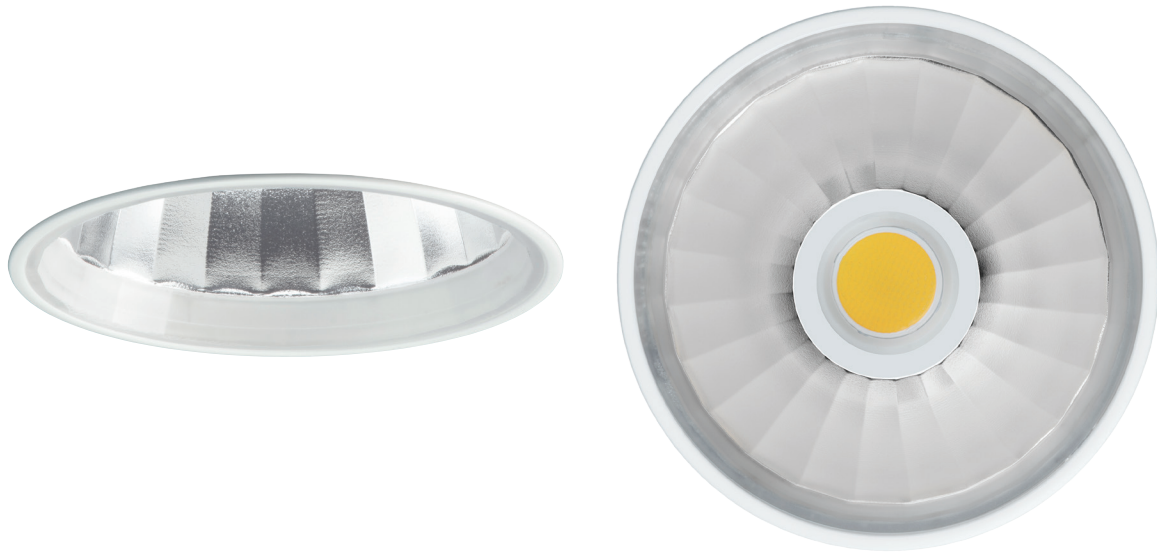

Microbezel® Plus

Options

■ Polycarbonate Options



569 Flush Clear




571 Flush Opal




573 Cylo Etched Ice


Photometrics

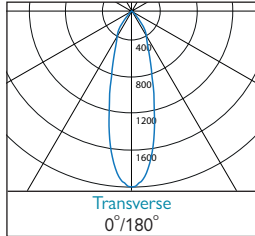


575 / 578 DLOR: 0.81

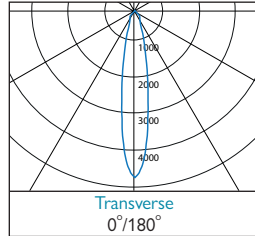

576 / 579 DLOR: 0.81

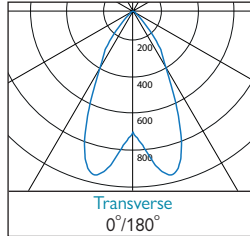

577 / 580 DLOR: 0.81

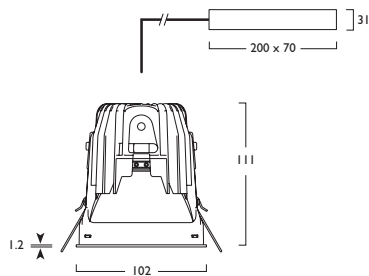

- 230V
50Hz
- IP**
20
- 98mm Ø
- 1.0 kg
- Narrow 18°
- Medium 28°
- Wide 54°

