



3	Warm White LED (3000K)	CRI 80	25W	31W	46W
	Lumen Output		4232 lm	5304 lm	7390 lm
	LOR		0.86	0.86	0.86
	CRI		80	80	80
	Total Power		25.7W	34.6W	49.3W
	Power Factor		0.98	0.95	0.95
	Running Current		0.11A	0.16A	0.23A
	Inrush Current (Std)		32.0A (240us)	15.0A (250us)	33.0A (250us)
	Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	40.0A (178us)
	Efficacy		141 lm/W	131 lm/W	128 lm/W
	Emergency Output (BLF)		465 lm (11%)	428 lm (8%)	443 lm (6%)
4	Neutral White LED (4000K)	CRI 80	25W	31W	46W
	Lumen Output		4428 lm	5550 lm	7732 lm
	LOR		0.86	0.86	0.86
	CRI		80	80	80
	Total Power		25.7W	34.6W	49.3W
	Power Factor		0.98	0.95	0.95
	Running Current		0.11A	0.16A	0.23A
	Inrush Current (Std)		32.0A (240us)	15.0A (250us)	33.0A (250us)
	Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	40.0A (178us)
	Efficacy		148 lm/W	137 lm/W	134 lm/W
	Emergency Output (BLF)		487 lm (11%)	444 lm (8%)	463 lm (6%)



- Available in a choice of lumen outputs, delivering up to 7732 lumens
- Efficacies up to 148 lm/W
- Comprehensive choice of wattages and Control Gear types
- Life expectancy 72,000 hours (L80 B10)
- Extruded 'wipe clean' clear polycarbonate refractor with internal linear microprisms
- Exceptional wide light distribution for general lighting applications
- Colour stability within 3 MacAdams
- Designed to accept fixings for lighting trunking and uni-strut
- Complementary Pendant version available
- Wireless Lighting Control available, see Connected video for full overview

Ariga Surface



LED

25W	LED	1239mm	SM395	LED	25	+	373
31W	LED	1239mm	SM395	LED	31	+	373
46W	LED	1239mm	SM395	LED	46	+	373

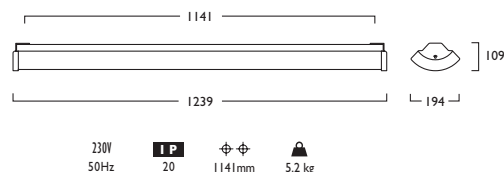


Options



258 Tamperproof End Caps

Photometrics



373 ULR: 0.04 DLOR: 0.82

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

258 Tamperproof End Caps

259 Tamperproof Screwdriver (T20)

Hacel
Fluent in Lighting