


- Professional quality DALI Track and Components
- Eminently suited for controlling diverse, adaptable lighting scenarios
- Available in surface and suspended versions
- Track and connectors rated at 16A  
(if operating on a single phase, neutral current must not exceed 16A)
- Compatible with Hacer Luminaires with a prefix TD
- Track can be cut to length by installer if required
- Conductor Bending Tool required to reset conductors after cutting

## DALI Track


DALI Track

1m	Surface/Suspended	TD1229	A	DAT016	—
2m	Surface/Suspended	TD1230	A	DAT016	—
3m	Surface/Suspended	TD1231	A	DAT016	—



230V 50Hz **IP** 10 1m/0.9kg 2m/1.8kg 3m/2.7kg 25kg



1m TD1229 A DAT 016  
2m TD1230 A DAT 016  
3m TD1231 A DAT 016  
DALI Track




L (m)	A (mm)	B (mm)	C (mm)	D (mm)
1m	250	—	—	—
2m	250	1000	—	—
3m	250	—	1000	1000

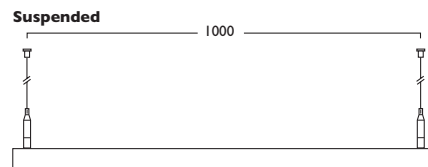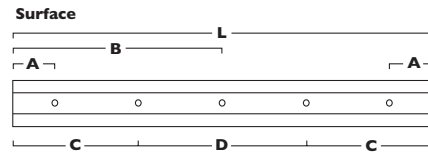


DALI Track Suspensions

Suspension Support	TD1248	X	DAT000	—
2m Suspension Wire Kit	TD1249	X	DAT000	4
5m Suspension Wire Kit	TD1250	X	DAT000	4

15kg



TD1249 X DAT 000  
2m Wire Suspension Kit



TD1250 X DAT 000  
5m Wire Suspension Kit

Wire suspension kits incorporate polished chrome clutches for ease of installation.

**A** Integral Driver/Remote  
**X** Non Electrical Component

**1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk)


V4 - 12/2023

# DALI Track


## DALI Track Components

Track Adaptor	TD1232	A	DAT006	—
Live End	TD1233	A	DAT016	—
Live End Reverse	TD1234	A	DAT016	—
Straight Connector	TD1235	A	DAT016	—
L Inner Connector	TD1236	A	DAT016	—
L Outer Connector	TD1237	A	DAT016	—
Centre Feed Connector	TD1239	A	DAT016	—
X Connector	TD1240	A	DAT016	—
Flexible Connector	TD1241	A	DAT016	—
Dead End	TD1242	A	DAT000	—
T Outer Connector	TD1243	A	DAT016	—
T Outer Connector	TD1244	A	DAT016	—
T Inner Connector	TD1245	A	DAT016	—
T Inner Connector	TD1246	A	DAT016	—
Conductor Bending Tool	TD1247	X	DAT000	—
Suspension Support	TD1248	X	DAT000	—


230V **IP**  
50Hz 10



**TD1232 A DAT 006**  
Track Adaptor




**TD1233 A DAT 016**  
Live End




**TD1234 A DAT 016**  
Live End Reverse




**TD1235 A DAT 016**  
Straight Connector




**TD1236 A DAT 016**  
L Inner Connector




**TD1237 A DAT 016**  
L Outer Connector



**TD1239 A DAT 016**  
Centre Feed Connector




**TD1240 A DAT 016**  
X Connector




**TD1241 A DAT 016**  
Flexible Connector




**TD1242 A DAT 000**  
Dead End




**TD1243 A DAT 016**  
T Outer Connector




**TD1244 A DAT 016**  
T Outer Connector



**TD1245 A DAT 016**  
T Inner Connector





**TD1246 A DAT 016**  
T Inner Connector



**TD1247 X DAT 000**  
Conductor Bending Tool



**TD1248 X DAT 000**  
Suspension Support

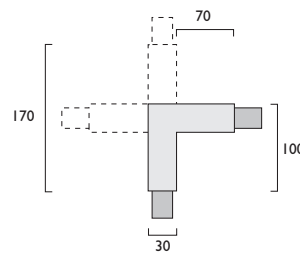

Continuity must be maintained

**A** No Control Gear 230V  
**X** Non Electrical Component

**1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk)

**Hacel**<sup>®</sup>  
Fluent in Lighting