



Maximum viewing distance 28m



**Arrow Left**

ISO Single & Double Sided



**Arrow Right**

ISO Single & Double Sided



**Arrow Up**

ISO Single & Double Sided



**Arrow Down**

ISO Single & Double Sided

PRODUCT INFORMATION

## Emerge Eco Exit Sign


LED								
1W	LED	Surface (Ceiling/Wall)	SD1544	E	LED 001	1	N/a	
1W	LED	Recessed (Ceiling/Wall)	ID1545	E	LED 001	1	N/a	
1W	LED	Suspended (Ceiling)	PN1546	E	LED 001	1	N/a	

Lumen Output  
LOR  
CRI/Ra Index  
Total Power  
Power Factor  
Running Current  
Inrush Current  
Emergency Output (BFL)

### 1W

N/a  
1.00  
80  
2.3W  
0.53  
0.02A  
18.7A (3us)  
N/a

- Surface, Wall, Recessed and Suspended, three hour Emergency Exit luminaires
- Hinged blade for wall mounting which also allows mounting on angled surfaces
- Can be wired as Maintained or Non Maintained
- Viewing distance 28m
- Supplied with Interchangeable ISO Legend Pack: Arrow Left, Arrow Right, Arrow Up and Arrow Down
- Life expectancy 100,000 hours (L70 B10)
- Recharge period 24 hours

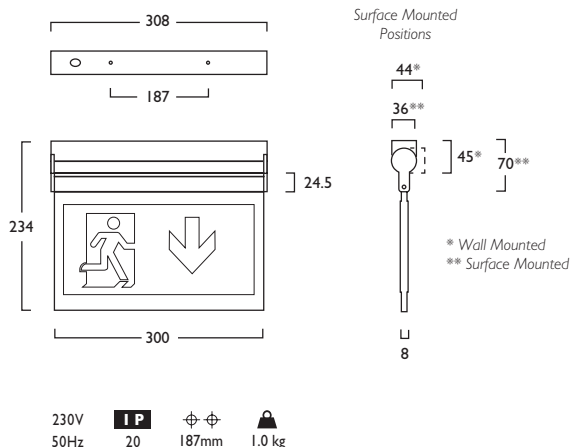

E Emergency

I White