


Emerge Escape IP65


LED	☀	☾	☐	🔌	⚠
5W LED	Surface (Ceiling/Wall)	SD1541	LED 005	1	605
5W LED	Recessed (Ceiling/Wall)	ID1542	LED 005	1	605

Colour Temp (5700K)	5W
Lumen Output	325
LOR	1.00
CRI/Ra Index	80
Total Power	7.1W
Power Factor	0.63
Running Current	0.05A
Inrush Current	19.8A (3us)
Emergency Output (BFL)	325 (100%)

- Versatile ceiling or over door, three hour Emergency luminaires
- Can be wired as Maintained or Non Maintained
- IP65 rating provides a robust design for challenging environments
- Daylight colour temperature (5700K)
- Life expectancy 100,000 hours (L70 B10)
- Recharge period 24 hours

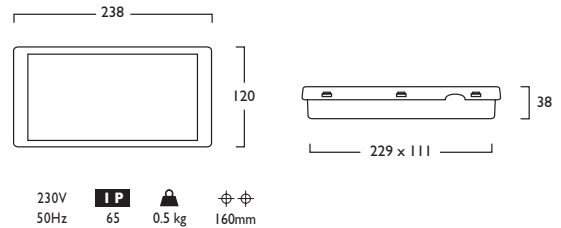

Photometrics

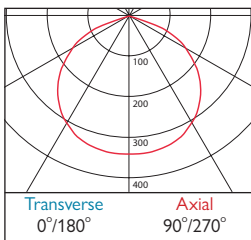

605 DLOR: 1.00

- E Emergency
- C DALI Emergency
- I White