

Maximum viewing distance 28m



Arrow Left
ISO Single & Double Sided



Arrow Right
ISO Single & Double Sided



Arrow Up
ISO Single & Double Sided



Arrow Down
ISO Single & Double Sided

Emerge Legend IP65

LED	Icon	Mounting	Model	Legend	Color	Code	Life
1W LED		Surface (Ceiling/Wall)	WL1547		LED 001	I	607
1W LED		Recessed (Ceiling/Wall)	WL1548		LED 001	I	607


Colour Temp (5700K)

Lumen Output	120
LOR	1.00
CR1/Ra Index	80
Total Power	4.0W
Power Factor	0.56
Running Current	0.03A
Inrush Current	18.4A (3us)
Emergency Output (BFL)	120 (100%)


IW

Lumen Output	120
LOR	1.00
CR1/Ra Index	80
Total Power	4.0W
Power Factor	0.56
Running Current	0.03A
Inrush Current	18.4A (3us)
Emergency Output (BFL)	120 (100%)

- Versatile ceiling or over door, three hour Emergency luminaires,
- Can be wired as Maintained or Non Maintained
- IP65 rating provides a robust design for challenging environments
- Supplied with Interchangeable ISO Legend Pack: Arrow Left, Arrow Right, Arrow Up and Arrow Down
- Can be used with or without Legends
- Daylight colour temperature (5700K)
- Life expectancy 100,000 hours (L70 B10)
- Recharge period 24 hours

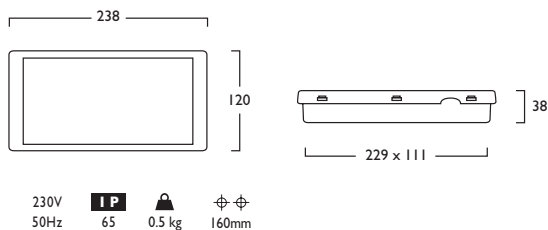

Photometrics

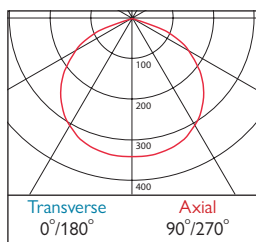

- E Emergency
- C DALI Dim + DALI Emergency
- I White