



Maximum viewing distance 28m



**Arrow Left**  
ISO Single & Double Sided



**Arrow Right**  
ISO Single & Double Sided



**Arrow Up**  
ISO Single & Double Sided




**Arrow Down**  
ISO Single & Double Sided

## Emerge Plus Exit Sign

LED	☀	☁	☑	🔌	🔊	🔒
1W LED	Surface (Ceiling/Wall)	SD1538	—	LED 001	1	N/a
1W LED	Recessed (Ceiling/Wall)	ID1539	—	LED 001	1	N/a
1W LED	Suspended (Ceiling)	PN1540	—	LED 001	1	N/a

	IW
Lumen Output	N/a
LOR	1.00
CRI/Ra Index	80
Total Power	2.0W
Power Factor	0.53
Running Current	0.02A
Inrush Current	18.4A (3us)
Emergency Output (BFL)	N/a

- Surface, Wall, Recessed and Suspended, three hour Emergency Exit luminaires
- Hinged blade for wall mounting which also allows mounting on angled surfaces
- Can be wired as Maintained or Non Maintained
- Viewing distance 28m
- Supplied with Interchangeable ISO Legend Pack: Arrow Left, Arrow Right, Arrow Up and Arrow Down
- Life expectancy 100,000 hours (L70 B10)
- Recharge period 24 hours

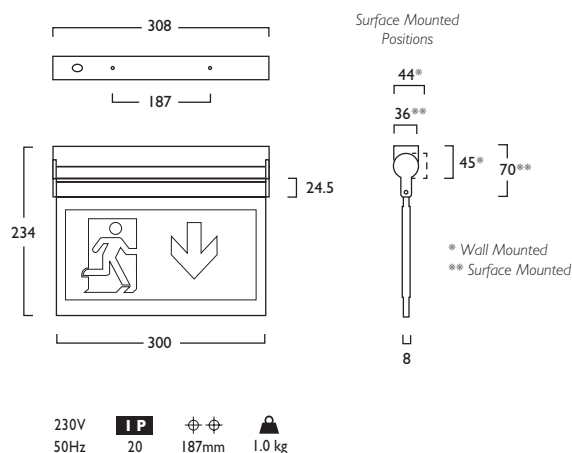

- E Emergency
- C DALI Emergency
- I White