




	CRI 80	2W
Lumen Output		206 lm
LOR		1.00
CRI	80	
Total Power		2.5W
Power Factor		0.63
Running Current		0.02A
Inrush Current		10.0A (120us)
Efficacy		82 lm/W
Emergency Output (BLF)		206 (100%)

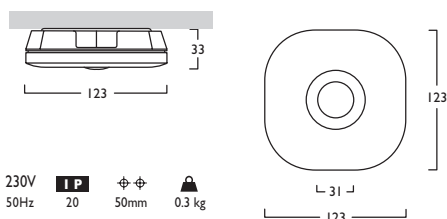

230V 50Hz IP 20 50mm 0.3 kg

Emy Surface Slim




LED


2W LED SD1284 LED 002 581/582/583

- Stand alone, three hour rated, non-maintained Emergency LED
- Three lenses included:
 - Anti-Panic - General emergency lighting applications
 - Escape Route - Corridor and escape route lighting applications
 - Spot - Highlighting emergency equipment
- Suitable for rear cable entry only
- Daylight colour temperature (6500K)
- Efficiencies up to 82 lm/W
- Output 206 lumens in emergency mode
- Life expectancy in excess of 50,000 hours (L90 B50)
- Colour stability within 3 MacAdams
- Lithium Iron Phosphate battery
- IK07 Compliant


Photometrics

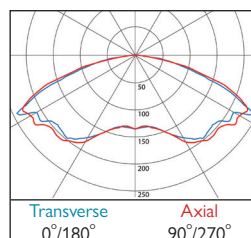

581 DLOR: 1.00

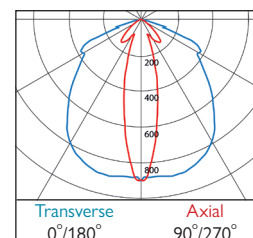

582 DLOR: 1.00

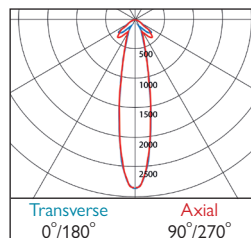

583 DLOR: 1.00

- E Emergency
- C DALI Emergency
- Z Self Test Emergency

1 White (RAL 9010) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk