

3	Warm White LED (3000K)	CRI 80	43W
	Lumen Output	5432 lm	
	LOR	0.81	
	CRI	80	
	Total Power	49.9W	
	Power Factor	0.95	
	Running Current	0.23A	
	Inrush Current (Std)	45.0A	
	Inrush Current (Dim)	43.0A	
	Efficacy	88 lm/W	
	Emergency Output (BLF)	N/a	

4	Neutral White LED (4000K)	CRI 80	43W
	Lumen Output	5460 lm	
	LOR	0.81	
	CRI	80	
	Total Power	49.9W	
	Power Factor	0.95	
	Running Current	0.23A	
	Inrush Current (Std)	45.0A	
	Inrush Current (Dim)	43.0A	
	Efficacy	88 lm/W	
	Emergency Output (BLF)	N/a	

- Elegant LED Wall Light with Chrome feature
- Can be mechanically linked to create an array of imaginative configurations
- Outputs up to 5460 lumens
- Life expectancy of 50,000 hours (L80 F10)
- Colour stability within 3 MacAdams
- Colour options apply to Driver Housing
- Complementary Pendant available
- Wireless Lighting Control available, see Connected video for full overview

Explora® Star Wall Light Solo

LED CRI 80


 43W LED Micro WL1218 LED 43 4 565

Link

LED CRI 80

 43W LED Micro WL1227 LED 43 4 565

Photometrics

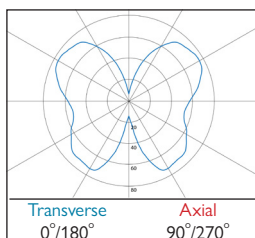


565 ULOR: 0.43 DLOR: 0.38

- A** Integral Driver/Remote
- J** Switch Dim
- S** DALI Dim
- L** DALI Bluetooth
- 3** Warm (3000K) **4** Neutral (4000K)
- 4** Polished Chrome



Explora® Star Wall Light

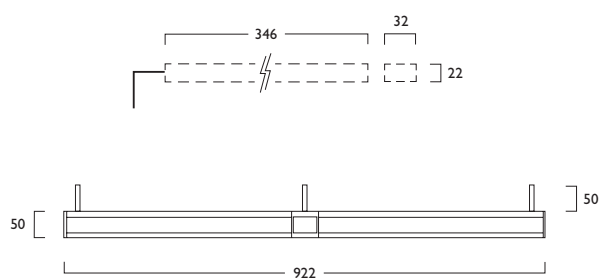

230V
50Hz

IP
20

⊕ ⊕
990mm Ø

⚡
3.3 kg

Gear Housing
⊕ ⊕
374mm

