

Solo Module shown

3	Warm White LED (3000K)	CRI 80	
		34W	48W
	Lumen Output	5785 lm	7770 lm
	LOR	0.84	0.84
	CRI	80	80
	Total Power	37.7W	52.3W
	Power Factor	0.95	0.95
	Running Current	0.18A	0.24A
	Inrush Current (Std)	38.0A (250us)	38.0A (250us)
	Inrush Current (Dim)	65.4A (176us)	72.0A (176us)
	Efficacy	128 lm/W	124 lm/W
	Emergency Output (BLF)	N/A	N/A


4	Neutral White LED (4000K)	CRI 80	
		34W	48W
	Lumen Output	6054 lm	8144 lm
	LOR	0.84	0.84
	CRI	80	80
	Total Power	37.7W	52.3W
	Power Factor	0.95	0.95
	Running Current	0.18A	0.24A
	Inrush Current (Std)	38.0A (250us)	38.0A (250us)
	Inrush Current (Dim)	65.4A (176us)	72.0A (176us)
	Efficacy	134 lm/W	130 lm/W
	Emergency Output (BLF)	N/A	N/A

- Precision Extruded Aluminium design
- Opal polycarbonate diffuser
- Plug and socket connections for quick assembly on link systems
- Available in a choice of lumen outputs, delivering up to 8144 lumens
- Efficacies up to 134 lm/W
- Outstanding performance with an LOR of 0.84
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview

## Infinitas® Micro Wallwasher Direct Indirect


☀️ 📏 👁️ 📏 Ⓚ 🔊 + ⚙️

LED		1142		LED		34		+		563	
34W	LED	1120mm	---	1142	---	LED	---	34	---	+	563
48W	LED	1120mm	---	1142	---	LED	---	48	---	+	563

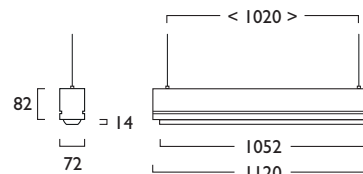

230V 50Hz IP20 80° 4.4 kg

### Photometrics



**563** ULOR: 0.08 DLOR: 0.76

IV Link Suspended (Direct/Indirect)

IK Solo Suspended (Direct/Indirect)

A Integral Driver/Remote

J Switch Dim

S DALI Dim

L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

I White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

303 2x 5m Suspensions (wires only)