


IP20 - Diffused on Board

LightLine® IP20 Diffused On Board Tape

- Seamless, continuous lines of light
- Available in 2500K, 3000K and 4000K
- CRI ≥80
- IP20 Rated
- Available in a choice of lumen outputs from 970 to 1050 lumens per metre
- Width dimension of 8mm
- Supplied as 5m reels, with 45.45mm cutting points
- 528 LED's per metre
- Continuous diffused LED - No spotting
- Fitted with 3M adhesive tape
- Choice of gear types including Smart Lighting Control

Single Colour Diffused Tape

Voltage	24V	24V	24V
Power Consumption	10W/M	10W/M	10W/M
LED's per metre	528/M	528/M	528/M
LED Pitch	1.9mm	1.9mm	1.9mm
Lumen Output	140lm/M	170lm/M	710lm/M
CRI	80Ra	80Ra	80Ra
Cut Points	45.45mm	45.45mm	45.45mm
CCT	2500K	3000K	4000K
IP	IP20	IP20	IP20
Rear Adhesive	3M Adhesive Tape	3M Adhesive Tape	3M Adhesive Tape
Working Temperature	-20°C - +40°C	-20°C - +40°C	-20°C - +40°C
Dimensions	5000 x 8 x 1.6mm	5000 x 8 x 1.6mm	5000 x 8 x 1.6mm

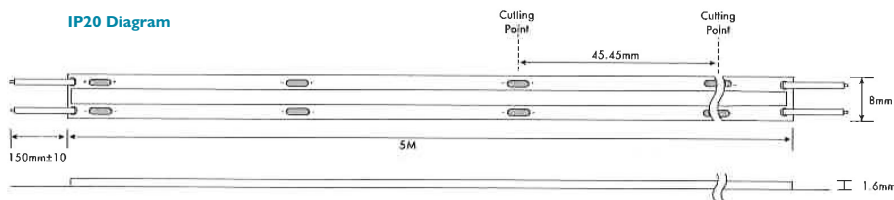

Contact Technical for further information - 0191 280 9911