




Link

Suspended & Surface


- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Neatly integrates general, accent and ambient lighting
- Engineering excellence with contemporary styling
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions





Link Suspended




+ Light Spill



Link Surface




Link Surface + Light Spill





Solo

Suspended & Surface


- Designed to complement Link Modules
- Slim, sleek design enhanced by choice of surface and suspended options
- Choice of light sources available
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions





Solo Suspended




+ Light Spill




Solo Surface



Solo Surface + Light Spill



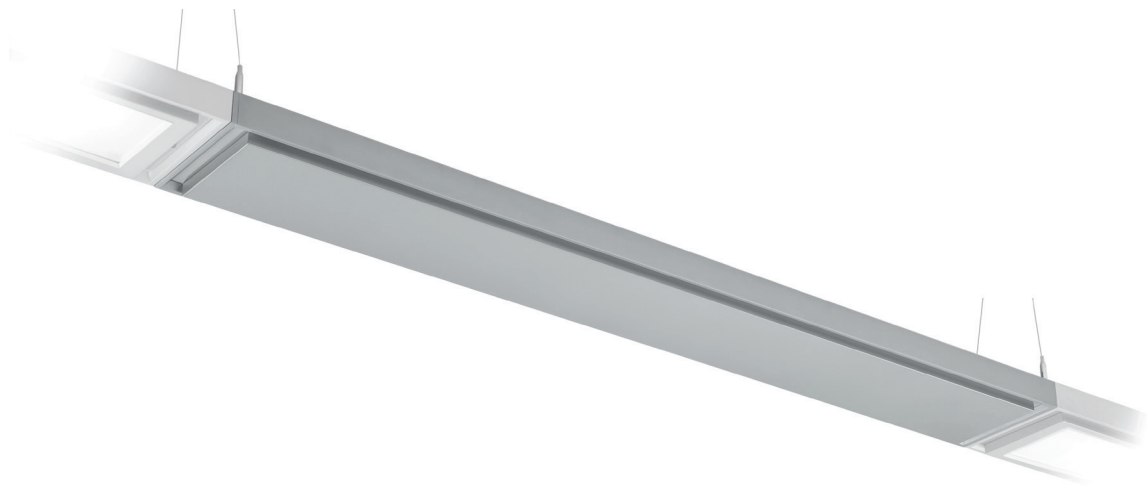

Linear Light⁴ Spacer/Components

Link Modules

	Icon 1	Icon 2	Icon 3	Icon 4	Icon 5
Spacer (inc. seven wire harness)	205mm	LL 027	A SPA016	---	---
Spacer (inc. seven wire harness)	600mm	640	A SPA016	---	+
Spacer (inc. seven wire harness)	750mm	028	A SPA016	---	+
Spacer (inc. seven wire harness)	1250mm	660	A SPA016	---	+
Spacer (inc. seven wire harness)	1500mm	029	A SPA016	---	+

230V 50Hz	IP 20	LL027	LA640	LA028	LA660	LA029
		-	577mm	727mm	1227mm	1477mm
			LC/LG640	LC/LG028	LC/LG660	LC/LG029
			300mm	450mm	1148mm	900mm
		027	640	028	660	029
		1.4 kg	3.5 kg	4.4 kg	6.7 kg	8.0 kg

Alternative sizes are available on request

PIR Spacer

	Icon 1	Icon 2	Icon 3	Icon 4	Icon 5
Spacer (inc. seven wire harness)	205mm	LL 036	A PIR016	---	---
Spacer (inc. seven wire harness)	600mm	708	A PIR016	---	+
Spacer (inc. seven wire harness)	750mm	037	A PIR016	---	+
Spacer (inc. seven wire harness)	1250mm	717	A PIR016	---	+
Spacer (inc. seven wire harness)	1500mm	038	A PIR016	---	+

230V 50Hz	IP 20	LL036	LA708	LA037	LA717	LA038
		-	577mm	727mm	1227mm	1477mm
			LC/LG708	LC/LG037	LC/LG717	LC/LG038
			300mm	450mm	1148mm	900mm
		036	708	037	717	038
		1.5 kg	3.6 kg	4.5 kg	6.8 kg	8.1 kg

PIR Spacer only suitable for use with Luminaires with Gear Types F, G


Connectors/End Cap

L Connector	LL032	A CON016	---
T Connector	LL033	A CON016	---
X Connector	LL034	A CON016	---
Module End Cap	LL035	X CAP000	---

Connectors

L PIR Connector	LL039	A PIR016	---
T PIR Connector	LL040	A PIR016	---
X PIR Connector	LL041	A PIR016	---

PIR Connector only suitable for use with Luminaires with Gear Types F, G
A single PIR can control up to four LED Modules

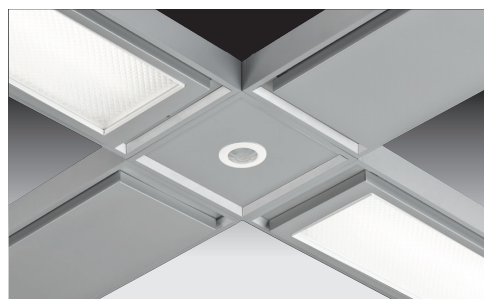


An inbuilt PIR Detector provides individual control via various operating modes to improve energy efficiency.

230V
50Hz

IP 20


1.5 kg

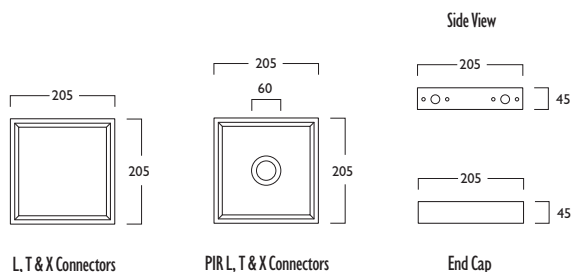

L, T & X Connectors

PIR L, T & X Connectors

End Cap

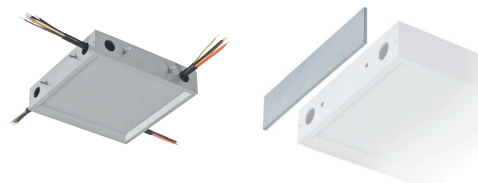

L, T & X Connectors

Module End Cap

- LA Link Suspended
- LC Link Surface
- LL PIR Blank Spacer
- A No Control Gear 230V
- X Non Electrical Component
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)
- 144 2x 5m Twin suspensions (wires only)