Link

Suspended & Surface

- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Neatly integrates general, accent and ambient lighting
- Engineering excellence with contemporary styling
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions
- Wireless Lighting Control available, see Connected video for full overview





Link Suspended



+ Light Spill





Link Surface





Link Surface + Light Spill

Solo

Suspended & Surface

- Designed to complement Link Modules
- Slim, sleek design enhanced by choice of surface and suspended options
- Choice of light sources available
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Suspended Modules are supplied with 2x 2m Twin Wire Suspensions
- Wireless Lighting Control available, see Connected video for full overview





Solo Suspended



+ Light Spill





Solo Surface





Solo Surface + Light Spill

Hacel®
Fluent in Lighting

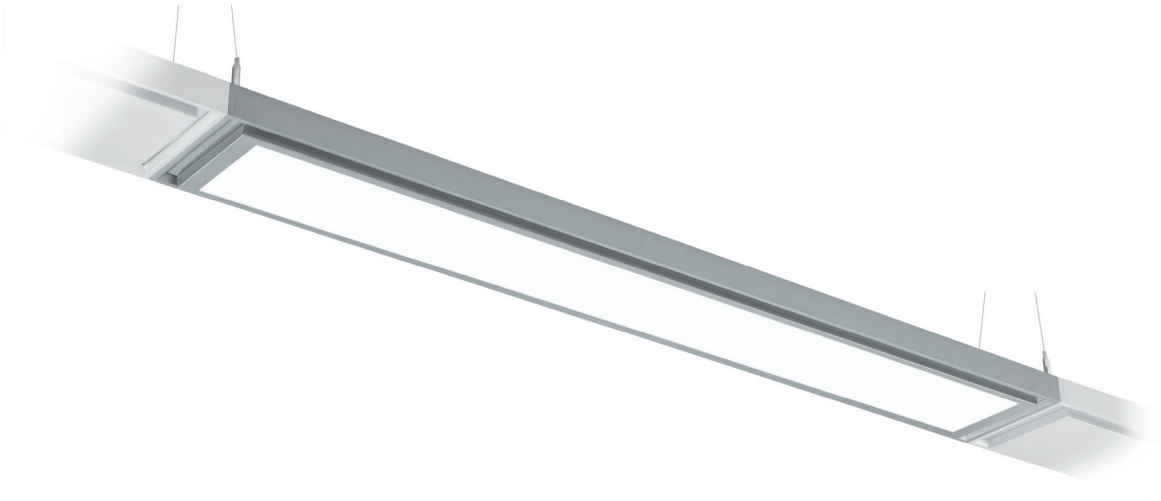

PRODUCT INFORMATION

3	Warm White LED (3000K)	CRI 80	25W	46W
	Lumen Output		4232 lm	7390 lm
	LOR		0.86	0.86
	CRI		80	80
	Total Power		25.7W	49.3W
	Power Factor		0.98	0.95
	Running Current		0.11A	0.23A
	Inrush Current (Std)		32.0A (240us)	33.0A (250us)
	Inrush Current (Dim)		29.0A (180us)	40.0A (178us)
	Efficacy		141 lm/W	128 lm/W
	Emergency Output (BLF)		465 lm (11%)	443 lm (6%)

4	Neutral White LED (4000K)	CRI 80	25W	46W
	Lumen Output		4428 lm	7732 lm
	LOR		0.86	0.86
	CRI		80	80
	Total Power		25.7W	49.3W
	Power Factor		0.98	0.95
	Running Current		0.11A	0.23A
	Inrush Current (Std)		32.0A (240us)	33.0A (250us)
	Inrush Current (Dim)		29.0A (180us)	40.0A (178us)
	Efficacy		148 lm/W	134 lm/W
	Emergency Output (BLF)		487 lm (11%)	463 lm (6%)

- Contemporary LED Module with high quality Opal polycarbonate diffuser
- Available in a choice of lumen outputs, delivering up to 7732 lumens
- Efficacies up to 148 lm/W
- Outstanding LOR of 0.86, light distribution for general lighting applications
- Diffuser is TP(b) rated
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- 2x 2m Twin suspension wires and chrome clutches for ease of adjustment
- Wireless Lighting Control available, see Connected video for full overview

Linear Light4 Opal

Link & Solo Modules

LED

25W	LED	1250mm	—	050	–	LED	–	25	–	+	383	384
46W	LED	1250mm	—	050	–	LED	–	46	–	+	383	384

230V 50Hz	IP 20	1227mm	LA, LB, LD, LE	1148mm	LC, LG, LF, LH	8.9 kg



383 DLOR: 0.86



384 DLOR: 0.85 ULOR: 0.01

LA	Link Suspended	**LB**	Link + Light Spill Suspended
LC	Link Surface	**LG**	Link + Light Spill Surface
LD	Solo Suspended	**LE**	Solo + Light Spill Suspended
LF	Solo Surface	**LH**	Solo + Light Spill Surface

Gear types F & G must be operated through a DSI

- **A** Integral Driver/Remote
- **E** Emergency
- **F** Digital Dim
- **G** Digital Dim + Emergency
- **J** Switch Dim
- **K** Switch Dim + Emergency
- **S** DALI Dim
- **T** DALI Dim + Emergency
- **C** DALI Dim + DALI Emergency
- **L** DALI Bluetooth
- **M** DALI Bluetooth + Emergency

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

144 2x 5m Twin Suspensions (wires only)

Tel: **(0191) 280 9911** Email: **technical@hacel.co.uk** Web: **www.hacel.co.uk**

Hacel®
Fluent in Lighting