



	CRI 80					CRI 90				
	5W	7W	12W	17W		5W	7W	12W	17W	
3 Warm White LED (3000K)										
Lumen Output	880 lm	1320 lm	2029 lm	2856 lm		745 lm	1118 lm	1719 lm	2419 lm	
LOR	0.91	0.91	0.91	0.91		0.91	0.91	0.91	0.91	
CRI	80	80	80	80		90	90	90	90	
Total Power	5.6W	8.6W	13.1W	18.2W		5.6W	8.6W	13.1W	18.2W	
Power Factor	0.92	0.92	0.90	0.90		0.92	0.92	0.90	0.90	
Running Current	0.03A	0.04A	0.06A	0.09A		0.03A	0.04A	0.06A	0.09A	
Inrush Current (Std)	17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)		17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)	
Inrush Current (Dim)	15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)		15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)	
Efficacy	143 lm/W	139 lm/W	140 lm/W	142 lm/W		121 lm/W	118 lm/W	119 lm/W	120 lm/W	
Emergency Output (BLF)	466 lm (53%)	448 lm (34%)	446 lm (22%)	456 lm (16%)		394 lm (53%)	380 lm (34%)	378 lm (22%)	387 lm (16%)	
4 Neutral White LED (4000K)										
Lumen Output	917 lm	1376 lm	2116 lm	2978 lm		783 lm	1175 lm	1806 lm	2542 lm	
LOR	0.91	0.91	0.91	0.91		0.91	0.91	0.91	0.91	
CRI	80	80	80	80		90	90	90	90	
Total Power	5.6W	8.6W	13.1W	18.2W		5.6W	8.6W	13.1W	18.2W	
Power Factor	0.92	0.92	0.90	0.90		0.92	0.92	0.90	0.90	
Running Current	0.03A	0.04A	0.06A	0.09A		0.03A	0.04A	0.06A	0.09A	
Inrush Current (Std)	17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)		17.0A (231us)	17.0A (231us)	8.0A (80us)	8.0A (80us)	
Inrush Current (Dim)	15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)		15.0A (243us)	15.0A (243us)	18.0A (140us)	25.0A (141us)	
Efficacy	149 lm/W	145 lm/W	146 lm/W	148 lm/W		127 lm/W	124 lm/W	125 lm/W	127 lm/W	
Emergency Output (BLF)	486 lm (53%)	467 lm (34%)	465 lm (22%)	476 lm (16%)		414 lm (53%)	399 lm (34%)	397 lm (22%)	406 lm (16%)	

Micro®

LED CRI 80	LED CRI 90
5W LED ID1286 LED 05 + 7W LED ID1286 LED 07 + 12W LED ID1286 LED 12 + 17W LED ID1286 LED 17 +	5W LED ID1287 LED 05 + 7W LED ID1287 LED 07 + 12W LED ID1287 LED 12 + 17W LED ID1287 LED 17 +

Add the required Reflector to code from list shown on page 2 (Reflector - Options)

- Flat bezel for minimalistic aesthetic appearance
- Precision die-cast construction
- Range of Reflector options available, Chrome, Matt, Dark & Gold
- Single point Zhaga Book 3 LED
- Choice of Diffuser options for customisation
- Choice of outputs up to 2978 lumens
- Efficacies up to 149 lm/W
- Life expectancy of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview


Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Reflector/ Polycarbonate Options - Examples Shown on page 2

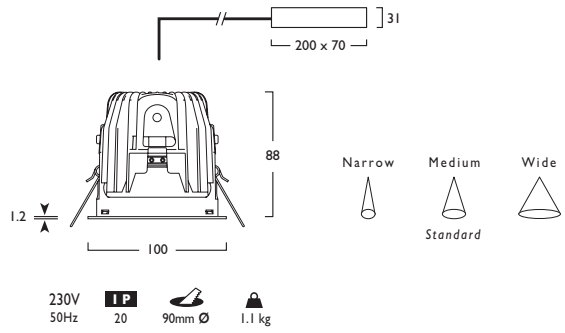

Micro®

Options

■ Reflector / Polycarbonate Options



574 Chrome - Narrow Beam
045 Chrome - Medium Beam (STD)
575 Chrome - Wide Beam



620 Matt Wide Beam



621 Dark Light - Narrow Beam
622 Dark Light - Medium Beam (STD)
623 Dark Light - Wide Beam



624 Gold - Narrow Beam
625 Gold - Medium Beam (STD)
626 Gold - Wide Beam

Reflector	▲		Beam	Angle	▲		
	CrI 80	CrI 90			CrI 80	CrI 90	
574 Chrome -			Narrow Beam	20°	590	593	
045 Chrome -			Medium Beam	38°	589	592	
575 Chrome -			Wide Beam	56°	591	594	
620 Matt -			Wide Beam	72°	705	708	
621 Dark Light -			Narrow Beam	26°	709	712	
622 Dark Light -			Medium Beam	62°	710	713	
623 Dark Light -			Wide Beam	84°	711	714	
			624 Gold -	Narrow Beam	26°	715	718
			625 Gold -	Medium Beam	52°	716	719
			626 Gold -	Wide Beam	74°	717	720



507 Flush Clear (IP44)
509 Flush Clear + Gasket (IP65)



508 Flush Opal (IP44)
510 Flush Opal + Gasket (IP65)



563 Cylo Etched Ice

■ Luminescent Halo Options



511 Neptune Blue



512 Mars Red




513 Acid Green




514 Etched Ice


Photometrics

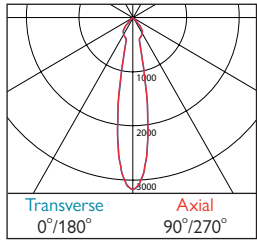


590 / 593 DLOR: 0.91
Chrome - Narrow Beam




589 / 592 DLOR: 0.91
Chrome - Medium Beam

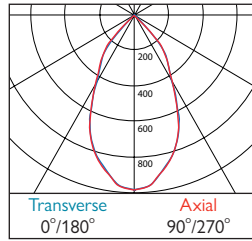


591 / 594 DLOR: 0.91
Chrome - Wide Beam




705 / 708 DLOR: 0.83
Semi Matt - Narrow Beam




709 / 712 DLOR: 0.65
Dark Light - Narrow Beam




710 / 713 DLOR: 0.68
Dark Light - Medium Beam




711/714 DLOR: 0.67
Dark Light - Wide Beam



715 / 718 DLOR: 0.85
Gold - Narrow Beam

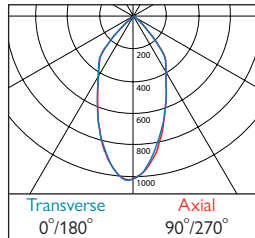

716 / 719 DLOR: 0.84
Gold - Medium Beam

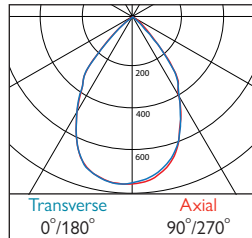

717 / 720 DLOR: 0.84
Gold - Wide Beam