

Chrome Reflector
(Standard)




IP65



Figures shown below are based on Gear Type - A Remote Driver

3	Warm White LED (3000K)	CRI 80	3W	6W
			504 lm	979 lm
	Lumen Output		0.79	0.79
	LOR		80	80
	CRI		3.3W	6.8W
	Total Power		0.65	0.9
	Power Factor		0.01A	0.03A
	Running Current		16.0A	16.0A
	Inrush Current (Std)		5.0A (100us)	5.0A (100us)
	Inrush Current (Dim)		120 lm/W	113 lm/W
	Efficacy		N/A	N/A
	Emergency Output (BLF)			

4	Neutral White LED (4000K)	CRI 80	3W	6W
			533 lm	1035 lm
	Lumen Output		0.79	0.79
	LOR		80	80
	CRI		3.3W	6.8W
	Total Power		0.65	0.9
	Power Factor		0.01A	0.03A
	Running Current		16.0A	16.0A
	Inrush Current (Std)		5.0A (100us)	5.0A (100us)
	Inrush Current (Dim)		127 lm/W	120 lm/W
	Efficacy		N/A	N/A
	Emergency Output (BLF)			

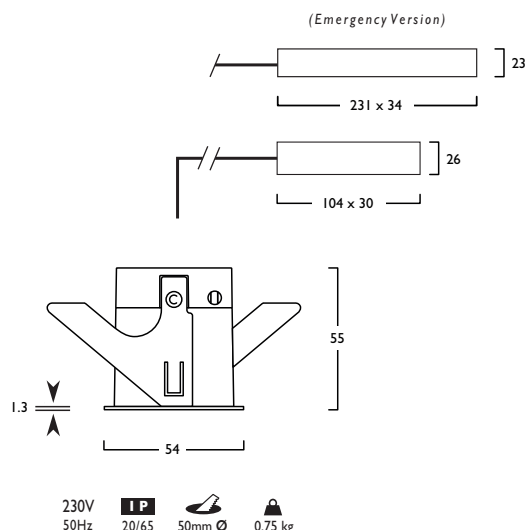

Nano

☀	☀	☀	☀	☀	☀
LED CRI 80					
3W	LED	ID1550	LED	03	+
6W	LED	ID1550	LED	06	+

Add the required Reflector to code from list shown on page 2 (Reflector - Options)
All options are factory fitted.

- Discreet bezel for minimalistic aesthetic appearance
- Precision die-cast construction
- Range of Reflector options available, Chrome, Semi Matt, Dark Light & Gold
- Remote Emergency options available
- Outputs up to 1035 lumens
- Efficacies up to 120 lm/W
- Life expectancy of 50,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Wireless Lighting Control available, see Connected video for full overview
- CRI90 version available (ID1551)
- IP65 and Chrome versions available

- A Integral Driver/Remote
- E Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth (6W Only)
- M DALI Bluetooth + Emergency (6W Only)

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005) 4 Chrome

Reflector/ Polycarbonate Options - Examples Shown on page 2



Nano

Options


Reflector / Polycarbonate Options




630 Chrome 36° (Standard)
646 Clear Chrome 36° (IP65)



631 Semi Matt 34°
647 Clear Semi Matt 34° (IP65)



632 Dark Light 24°
648 Clear Dark Light 24° (IP65)



633 Gold 30°
649 Clear Gold 30° (IP65)




645 Opal Polycarbonate 36° (IP65)


All options are factory fitted.

Reflector				Polycarbonate			
	CRI 80				CRI 80		
630 Chrome (Std) - 36°	724	646 Clear Chrome - 36°	724	645 Opal - 36°	733		
631 Semi Matt - 34°	730	647 Clear Semi Matt - 34°	730				
632 Dark Light - 24°	731	648 Clear Dark Light - 24°	731				
633 Gold - 30°	732	649 Clear Gold - 30°	732				


Photometrics




724 DLOR: 0.79
Chrome Reflector




730 DLOR: 0.79
Matt Reflector



731 DLOR: 0.53
Dark Light Reflector



732 DLOR: 0.75
Gold Reflector



733 DLOR: 0.47
Flush Opal