


3	Warm White LED (3000K)	CRI 80			
		14W	16W	23W	30W
	Lumen Output	1040 lm	2232 lm	2976 lm	3720 lm
	LOR	0.84	0.84	0.84	0.84
	CRI	80	80	80	80
	Total Power	14.0W	19.5W	26.9W	34.6W
	Power Factor	N/A	0.94	0.97	0.97
	Running Current	0.06A	0.09A	0.12A	0.16A
	Inrush Current	N/A	4A (40us)	9A (40us)	9A (40us)
	Efficacy	62 lm/W	96 lm/W	92 lm/W	90 lm/W
	Emergency Output (BLF)	N/A	N/A	N/A	N/A

4	Neutral White LED (4000K)	CRI 80			
		14W	16W	23W	30W
	Lumen Output	1040 lm	2448 lm	3264 lm	4080 lm
	LOR	0.84	0.84	0.84	0.84
	CRI	80	80	80	80
	Total Power	14.0W	19.5W	26.9W	34.6W
	Power Factor	N/A	0.94	0.97	0.97
	Running Current	0.06A	0.09A	0.12A	0.16A
	Inrush Current	N/A	4A (40us)	9A (40us)	9A (40us)
	Efficacy	62 lm/W	105 lm/W	101 lm/W	99 lm/W
	Emergency Output (BLF)	N/A	N/A	N/A	N/A

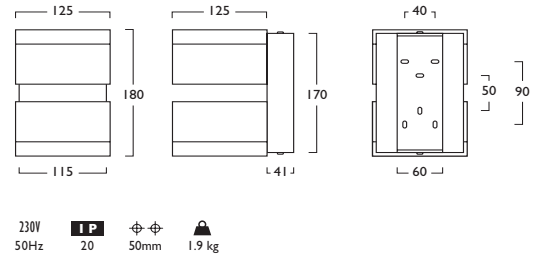


Quba Duet

LED

Power	LED	WL061	A	LED	—	—	—	—	—	—
14W	LED	WL061	A	LED	—	14	—	—	—	427
16W	LED	WL061	—	LED	—	16	—	—	—	427
23W	LED	WL061	—	LED	—	23	—	—	—	427
30W	LED	WL061	—	LED	—	30	—	—	—	427

- Sharp design, cutting edge appearance
- Available in a choice of lumen outputs, delivering up to 4080 lumens
- Efficacies up to 105 lm/W
- Discreetly etched polycarbonate diffusers
- Life expectancy in excess of 50,000 hours (L80 B10) excluding 14W
- Colour stability within 3 MacAdams

Photometrics



427 ULOR: 0.41 DLOR: 0.41

Gear type F must be operated through a DSI

- A Integral Driver/Remote
- F Digital Dim
- J Switch Dim
- S DALI Dim

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)