


3	Warm White LED (3000K)	CRI 80	7W	8W	12W	15W
	Lumen Output		520 lm	1116 lm	1488 lm	1860 lm
	LOR		0.84	0.84	0.84	0.84
	CRI		80	80	80	80
	Total Power		7.0W	9.8W	13.8W	17.7W
	Power Factor		N/A	0.90	0.94	0.94
	Running Current		0.03A	0.05A	0.06A	0.08A
	Inrush Current		N/A	6A (20us)	4A (40us)	4A (40us)
	Efficacy		62 lm/W	95 lm/W	90 lm/W	88 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A	N/A

4	Neutral White LED (4000K)	CRI 80	7W	8W	12W	15W
	Lumen Output		520 lm	1224 lm	1632 lm	2040 lm
	LOR		0.84	0.84	0.84	0.84
	CRI		80	80	80	80
	Total Power		7.0W	9.8W	13.8W	17.7W
	Power Factor		N/A	0.90	0.94	0.94
	Running Current		0.03A	0.05A	0.06A	0.08A
	Inrush Current		N/A	6A (20us)	4A (40us)	4A (40us)
	Efficacy		62 lm/W	104 lm/W	99 lm/W	96 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A	N/A




Quba Solo

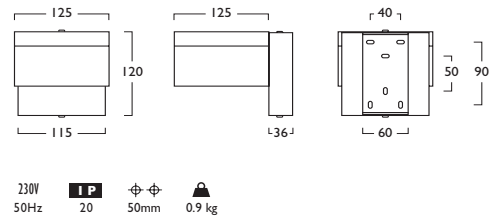

LED	7W	8W	12W	15W
LED	WLO60	WLO60	WLO60	WLO60
A	—	—	—	—
F	—	—	—	—
J	—	—	—	—
S	—	—	—	—
	07	08	12	15
	426	426	426	426

- Sharp design, cutting edge appearance
- Available in a choice of lumen outputs, delivering up to 2040 lumens
- Efficacies up to 104 lm/W
- Discreetly etched polycarbonate diffusers
- Life expectancy in excess of 50,000 hours (L80 B10) excluding 7W
- Colour stability within 3 MacAdams

Photometrics

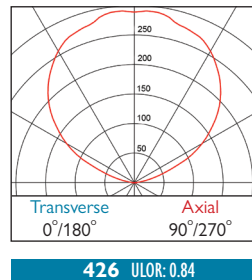

Gear type F must be operated through a DSI

- A Integral Driver/Remote
- F Digital Dim
- J Switch Dim
- S DALI Dim

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

V3 - 06/2023