



3 Warm White LED (3000K)	CRI 80	17W	24W	29W	22W	30W	36W
	Lumen Output		3264 lm	4338 lm	5063 lm	4080 lm	5422 lm
LOR		0.75	0.75	0.75	0.75	0.75	0.75
CRI		80	80	80	80	80	80
Total Power		19.2W	26.7W	31.9W	23.7W	33.3W	39.8W
Power Factor		0.81	0.96	0.97	0.89	0.95	0.95
Running Current		0.07A	0.11A	0.14A	0.09A	0.14A	0.17A
Inrush Current (Std)		5.33A (38us)	15A (250us)	15.0A (250us)	28A (150us)	25.0A (280us)	25.0A (280us)
Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)
Efficacy		127 lm/W	121 lm/W	119 lm/W	129 lm/W	122 lm/W	119 lm/W
Emergency Output (BLF)		455 lm (14%)	455 lm (10%)	455 lm (9%)	327 lm (8%)	327 lm (6%)	327 lm (5%)

4 Neutral White LED (4000K)	CRI 80	17W	24W	29W	22W	30W	36W
	Lumen Output		3494 lm	4643 lm	5420 lm	4352 lm	5783 lm
LOR		0.75	0.75	0.75	0.75	0.75	0.75
CRI		80	80	80	80	80	80
Total Power		19.2W	26.7W	31.9W	23.7W	33.3W	39.8W
Power Factor		0.81	0.96	0.97	0.89	0.95	0.95
Running Current		0.07A	0.11A	0.14A	0.09A	0.14A	0.17A
Inrush Current (Std)		5.33A (38us)	15A (250us)	15.0A (250us)	28A (150us)	25.0A (280us)	25.0A (280us)
Inrush Current (Dim)		22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)	22.4A (176us)
Efficacy		136 lm/W	130 lm/W	127 lm/W	137 lm/W	130 lm/W	127 lm/W
Emergency Output (BLF)		478 lm (14%)	478 lm (10%)	478 lm (9%)	344 lm (8%)	344 lm (6%)	344 lm (5%)

Skola® Surface



LED

Wattage	LED	Length	SKU	Color	Beam Angle	Output	Efficacy
17W	LED	1203mm	SM1633	Green	17°	725	127 lm/W
24W	LED	1203mm	SM1633	Green	24°	725	121 lm/W
29W	LED	1203mm	SM1633	Green	29°	725	119 lm/W
22W	LED	1483mm	SM1635	Green	22°	726	129 lm/W
30W	LED	1483mm	SM1635	Green	30°	726	122 lm/W
36W	LED	1483mm	SM1635	Green	36°	726	119 lm/W

LED & MW

Wattage	LED	Length	SKU	Color	Beam Angle	Output	Efficacy
17W	LED	1203mm	SM1656	Green	17°	725	127 lm/W
24W	LED	1203mm	SM1656	Green	24°	725	121 lm/W
29W	LED	1203mm	SM1656	Green	29°	725	119 lm/W
22W	LED	1483mm	SM1658	Green	22°	726	129 lm/W
30W	LED	1483mm	SM1658	Green	30°	726	122 lm/W
36W	LED	1483mm	SM1658	Green	36°	726	119 lm/W

MW versions not suitable for use with Gear Types J, K, L and M


Gear types F & G must be operated through a DSI

- A** Integral Driver/Remote
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010)

640 Tamper Proof End Caps

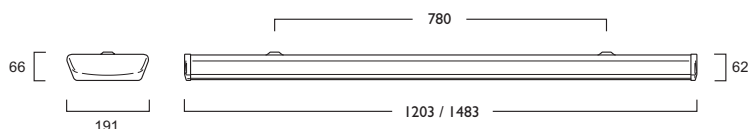

230V 50Hz IP44 780mm 3.9 kg 1203mm 4.0 kg 1483mm

Control Devices

PIR Handset

CD1602 X PIR000


- Available in a choice of lumen output up to 6751 lumens
- Efficacies up to 130 lm/W
- Life expectancy 72,000 hours (L80 B10)
- UGR compliant across all wattages, rated at UGR 19 or less
- IP44 and IK08 rated with colour stability within 3 MacAdams
- Complementary Pendant version available
- Tool Free extruded Polycarbonate diffuser
- Wireless Lighting Control available, see Connected video for full overview
- Available with integral Bluetooth or Microwave sensors
- The Microwave sensors defaults can be modified via dip switches for non-dimmable versions and the use of the PIR Handset for dimmable versions. Contact Technical for advice if required
- Dip switch settings can be found on installation document - default setting is 5 Seconds
- Suitable for mounting with 20mm and 25mm conduit / besa boxes on 600mm centres or direct feed via knock outs
- Tamper proof end caps option available
- Tool free gear tray for quick and easy installation

Hacel
Fluent in Lighting




Skola® Surface

Photometrics

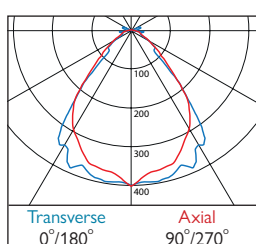

725 DLOR: 0.75

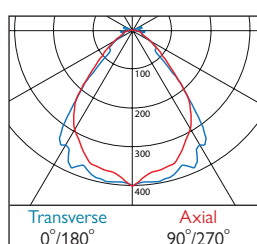

726 DLOR: 0.75