



Aart® Micro



LED CRI 80

Surface

12W	LED	IS1272	LED	12	585
15W	LED	IS1272	LED	15	585

Three Circuit Track

12W	LED	TT1272	LED	12	585
15W	LED	TT1272	LED	15	585

DALI Track

12W	LED	TD1272	LED	12	585
15W	LED	TD1272	LED	15	585



LED CRI 90

Surface

12W	LED	IS1273	LED	12	586
15W	LED	IS1273	LED	15	586


Three Circuit Track

12W	LED	TT1273	LED	12	586
15W	LED	TT1273	LED	15	586


DALI Track

12W	LED	TD1273	LED	12	586
15W	LED	TD1273	LED	15	586

TT versions not suitable for use with Gear Types J & S
TD versions not suitable for use with Gears Type A & L

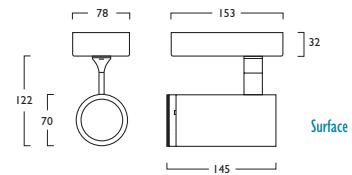

230V 50Hz IP20 90° 347° 130 x 50mm 1.1 kg

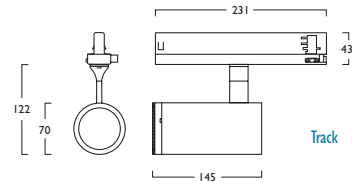

230V 50Hz IP20 90° 347° 1.1 kg

- Ideally suited to Museums, Art Galleries and Retail applications
- Adjustable beam angle from 8° (Narrow) to 55° (Wide)
- Available in a choice of lumen outputs up to 2298 lumens
- Life expectancy in excess of 55,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- Protective glass fitted as standard
- DALI Track versions are eminently suited to diverse, adaptable lighting scenarios. The Track requires the relevant dimming wiring
- Wireless Lighting Control available, see Connected video for full overview

A Integral Driver/Remote

J Switch Dim

S DALI Dim

L DALI Bluetooth

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

V3 - 06/2023

Hacel[®]
Fluent in Lighting



Aart® Micro

	CRI 80		CRI 90	
	12W	15W	12W	15W
3 Warm White LED (3000K)				
Lumen Output	1824 lm	2174 lm	1506 lm	1795 lm
LOR	0.70	0.70	0.70	0.70
CRI	80	80	90	90
Total Power	14.3W	17.8W	14.3W	17.8W
Power Factor	0.95	0.95	0.95	0.95
Running Current	0.07A	0.08A	0.07A	0.08A
Inrush Current (Std)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)
Inrush Current (Dim)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)
Efficacy	89 lm/W	85 lm/W	73 lm/W	70 lm/W
Emergency Output (BLF)	N/A	N/A	N/A	N/A
4 Neutral White LED (4000K)				
Lumen Output	1928 lm	2298 lm	1611 lm	1921 lm
LOR	0.70	0.70	0.70	0.70
CRI	80	80	90	90
Total Power	14.3W	17.8W	14.3W	17.8W
Power Factor	0.95	0.95	0.95	0.95
Running Current	0.07A	0.08A	0.07A	0.08A
Inrush Current (Std)	8.0A (80us)	8.0A (80us)	8.0A (80us)	8.0A (80us)
Inrush Current (Dim)	9.6A (34us)	9.6A (34us)	9.6A (34us)	9.6A (34us)
Efficacy	94 lm/W	90 lm/W	78 lm/W	75 lm/W
Emergency Output (BLF)	N/A	N/A	N/A	N/A

Photometrics

