



Xcel® 4




LED CRI 80

7W LED ID1255 7 597

LED CRI 90

7W LED ID1256 7 598

- Injection moulded Shade and Lens construction
- Superior lighting class LED Modules and Drivers
- Lumens output up to 1182 lm with a UGR <19
- Efficacies up to 134 lm/W
- Life expectancy in excess of 75,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Emergency LED (charge/fault) requires additional mounting hole
- Wireless Lighting Control available, see Connected video for full overview

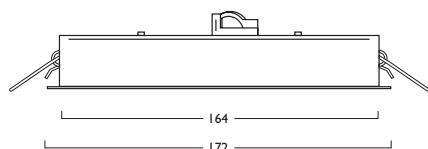

240V 50Hz IP 20 167 x 47mm 0.45 kg 0.62 kg EM

3 Warm White LED (3000K)

Lumen Output
LOR
CRI
Total Power
Power Factor
Running Current
Inrush Current
Efficacy
Emergency Output (BLF)

CRI 80 7W

1130 lm
0.76
80
6.7W
0.98
0.03A
17.0A (231us)
128 lm/W
N/A

CRI 90 7W

980 lm
0.76
90
6.7W
0.98
0.03A
17.0A (231us)
111 lm/W
N/A

4 Neutral White LED (4000K)

Lumen Output
LOR
CRI
Total Power
Power Factor
Running Current
Inrush Current
Efficacy
Emergency Output (BLF)


CRI 80 7W

1182 lm
0.76
80
6.7W
0.98
0.03A
17.0A (231us)
134 lm/W
399

CRI 90 7W

1023 lm
0.76
90
6.7W
0.98
0.03A
17.0A (231us)
116 lm/W
399

Photometrics



597 DLOR: 0.76

Gear types F & G must be operated through a DSI

- A Integral Driver/Remote
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency
- L DALI Bluetooth
- M DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

V5 - 06/2023

Hacel®
Fluent in Lighting