



Xcel® 7



LED CRI 80

12W LED ID1264 LED 12 595

LED CRI 90

12W LED ID1265 LED 12 596

- Injection moulded Shade and Lens construction
- Superior lighting class LED Modules and Drivers
- Lumens output up to 2069 lm
- Efficacies up to 116 lm/W
- Life expectancy in excess of 75,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Emergency LED (charge/fault) requires additional mounting hole
- Wireless Lighting Control available, see Connected video for full overview

3 Warm White LED (3000K)

Lumen Output
LOR
CRI
Total Power
Power Factor
Running Current
Inrush Current
Efficacy
Emergency Output (BLF)

CRI 80 12W

1977 lm
0.76
90
13.5W
0.95
0.06A
6.0A (80us)
111 lm/W
N/A

CRI 90 12W

1715 lm
0.76
90
13.5W
0.95
0.06A
6.0A (80us)
96 lm/W
N/A

4 Neutral White LED (4000K)



Lumen Output
LOR
CRI
Total Power
Power Factor
Running Current
Inrush Current
Efficacy
Emergency Output (BLF)

CRI 80 12W

2069 lm
0.76
90
13.5W
0.95
0.06A
6.0A (80us)
116 lm/W
N/A


CRI 90 12W

1791 lm
0.76
90
13.5W
0.95
0.06A
6.0A (80us)
100 lm/W
N/A

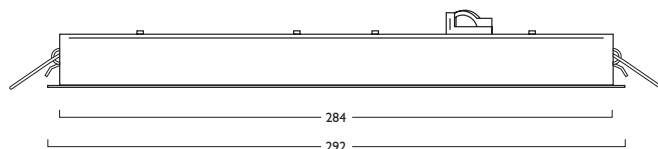

240V 50Hz **IP** 20 287 x 47mm 0.6 kg 0.8 kg EM

Photometrics



595 DLOR: 0.76

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)