




SkyMod® IP65 Wafer Grid



LED

36W LED IM1590 LED 4 36 1 584

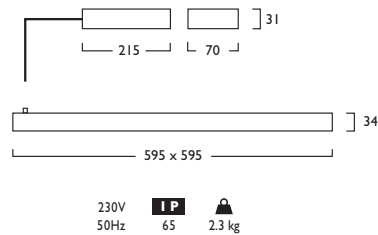


Designed for 15mm and 25mm T grid ceilings

| 4 | Neutral White LED (4000K) | CRI 80 36W |
|---|---------------------------|---------------|
| | Lumen Output | 4320 lm |
| | LOR | 1.00 |
| | CRI | 80 |
| | Total Power | 36.0W |
| | Power Factor | 0.95 |
| | Running Current | 0.95A |
| | Inrush Current | 24.7A (268us) |
| | Efficacy | 120 lm/W |
| | Emergency Output (BLF) | 430 lm (10%) |

- Slim profile of only 34mm
- IP65 rated from below
- High quality Polycarbonate Micro Prism refractor offering UGR <19
- TP(a) rated as standard
- Delivering up to 4320 lumens
- Efficacies up to 120 lm/W
- Life expectancy in excess of 50,000 hours (L70 B10)
- Wide choice of high quality control gear
- Wireless Lighting Control available, see Connected video for full overview

Photometrics



Gear types F & V must be operated through a DSI

- A** Integral Driver/Remote
 - E** Emergency
 - F** Digital Dim
 - V** Digital Dim + SelfTest Emergency
 - J** Switch Dim
 - Y** Switch Dim + SelfTest Emergency
 - S** DALI Dim
 - U** DALI Dim + SelfTest Emergency
 - C** DALI Dim + DALI Emergency
 - L** DALI Bluetooth
 - M** DALI Bluetooth + Emergency
-
- 4** Neutral (4000K)
 - I** White (RAL 9010)

Interconnection options available contact Sales